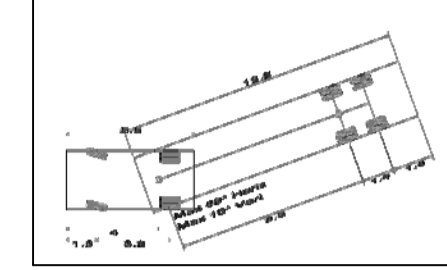



VALE OF GLAMORGAN COUNCIL  
AMENDED PLANS  
RECEIVED Date.....

2015/00031/OUT  
Rec'd 16-04-2015

THE VALE OF GLAMORGAN COUNCIL  
TOWN AND COUNTRY PLANNING ACT 1990  
**APPROVED**  
SUBJECT TO COMPLIANCE WITH CONDITIONS (IF ANY)

<b>Vehicle Name: FTA Design Articulated Vehicle (1983)</b>	
Type:	Articulated Vehicle
Category:	Savvy
Classification:	Savvy
Source:	Designing for deliveries, FTA 1983
Description:	Design vehicle
Notes:	
Unit 1 Name:	FTA Design Articulated Vehicle
Tractor:	
Unit 1 Name:	FTA Design Articulated Vehicle
Semi-Trailer:	
	
<b>FTA Design Articulated Vehicle (1983)</b>	
Overall Length:	15.500m
Overall Width:	2.500m
Overall Body Height:	3.695m
Mt Body Ground Clearance:	0.427m
Track Width:	2.500m
Lock to Lock Time:	6.00s
Kerb to Kerb Turning Radius:	6.750m
<b>Vehicle Tracking Vehicle Details Ref: 100042</b>	
Unit Name:	FTA Design Articulated Vehicle
Tractor:	Tractor (with driver controlled steering)
Body style:	Articulated Vehicle Tractor
Classification:	Savvy
Source:	Designing for deliveries, FTA 1983
Description:	Design vehicle
Notes:	
Datum:	Front Primary Axle
Front Axle(s):	1 Ackerman (axles fixed, wheels turn)
Primary Front Axle Offset:	0.000m
Effective Front Axle Offset:	0.000m (Auto Calculated)
Maximum Wheel Angle:	Unlimited
Status:	Active Non Self-Steered
Track Width:	2.500m
Total Wheels:	2 (positioned at the ends of the axle)
Tyre Width:	0.250m (Auto Calculated - proportion of Track Width)
Tyre Diameter:	0.875m (Auto Calculated - proportion of Track Width)
Rear Axle(s):	1 Fixed
Primary Rear Axle Offset:	3.200m (Innermost Axle behind Front Primary Axle)
Effective Rear Axle Offset:	3.200m (Auto Calculated)
Maximum Wheel Angle:	Unlimited
Status:	Active Non Self-Steered
Track Width:	2.500m
Total Wheels:	4 (positioned at the ends of the axle)
Tyre Width:	0.250m (Auto Calculated - proportion of Track Width)
Tyre Diameter:	0.875m (Auto Calculated - proportion of Track Width)
Steering:	Front Axle(s)
Min. Kerb / Kerb Turning Radius:	6.750m (based upon all axles)
Calculated Maximum Wheel Angle:	42.000deg
Lock to Lock Time (Fwd/Rev):	6.00sec / 6.00sec
Driver / Pilot:	
Driver Offset Longitudinally:	-0.200m (in front of Front Primary Axle)
Driver / Pilot Offset Laterally:	-0.600m (Right of Centreline)
Driver Height:	2.200m (Above ground level)
Front coupling:	None
Rear coupling:	Generic
Coupling Offset:	2.700m (behind Front Primary Axle)
Coupling Height:	0.875m (Auto Calculated - proportion of Tyre Diameter)
Capability:	Can tow or be towed
Max. Horizontal Articulation Angle:	90.000deg
Max. Vertical Articulation Angle:	10.000deg
Body outline (plan):	Rectangle
Outline Type:	Rectangle
Offset (X,Y):	-1.300m, 0.000m
Length / Width:	5.500m / 2.500m
Outline Type:	Line
Offset (X,Y):	3.200m, 0.000m
Vertices:	1
1:	0.000, 0.000
<b>Unit Name: FTA Design Articulated Vehicle Semi-Trailer</b>	
Type:	Trailer (no driver controlled steering)
Body style:	Articulated Vehicle Semi-Trailer
Classification:	Savvy
Source:	Designing for deliveries, FTA 1983
Description:	Design vehicle
Notes:	
Datum:	Front coupling
Maximum Articulation Angle:	90deg (to previous unit)
Front Axle(s):	None
Rear Axle(s):	2 Fixed (All axles identical)
Primary Rear Axle Offset:	8.300m (Innermost Axle behind Front coupling)
Effective Rear Axle Offset:	9.000m (Auto Calculated)
Maximum Wheel Angle:	Unlimited
Rear Axle Spacing:	1.400m
Status:	Active Non Self-Steered
Track Width:	2.500m
Total Wheels:	4 (positioned at the ends of the axle)
Tyre Width:	0.250m (Auto Calculated - proportion of Track Width)
Tyre Diameter:	0.875m (Auto Calculated - proportion of Track Width)
Front coupling:	Generic
Coupling Offset:	0.000m (in front of Front coupling)
Coupling Height:	0.438m (Auto Calculated - proportion of Tyre Diameter)
Capability:	Can tow or be towed
Max. Horizontal Articulation Angle:	90.000deg
Max. Vertical Articulation Angle:	10.000deg
Rear coupling:	Generic
Coupling Offset:	8.300m (behind Front coupling)
Coupling Height:	0.875m (Auto Calculated - proportion of Tyre Diameter)
Capability:	Can tow or be towed
Max. Horizontal Articulation Angle:	90.000deg
Max. Vertical Articulation Angle:	10.000deg
Body outline (plan):	Rectangle
Outline Type:	Rectangle
Offset (X,Y):	-0.700m, 0.000m
Length / Width:	12.200m / 2.500m
Outline Type:	Line
Offset (X,Y):	8.300m, 0.000m
Vertices:	1
1:	0.000, 0.000

- Legend**
- ① FEEDSTOCK RECEPTION
  - ② FEEDSTOCK FEED SYSTEM
  - ③ ASH SILOS
  - ④ MAIN PROCESS BUILDING
  - ⑤ FGT AND EXHAUST (EXTERNAL)
  - ⑥ WELFARE & ANCILLIARIES
  - ⑦ TURBINE
  - ⑧ ACC
  - ⑨ CAR PARKING



C					
B					
A	REDRAWN FROM E1627-2002 ISSUED FOR DISCUSSION	JW	MVG	KC	20.03.15
Rev	Revision details	Drn	Chk	App	Date

THIS DESIGN & DRAWING IS CONFIDENTIAL AND IT AND THE COPYRIGHT THEREIN ARE THE PROPERTY OF WHICH PROCESS LTD. THIS DRAWING IS SUPPLIED ON THE CONDITION THAT IT MUST NOT BE USED OR EXHIBITED WITHOUT THEIR WRITTEN PERMISSION AND THAT IT SHALL BE USED ONLY AS A REFERENCE TO WORK BY THE ABOVE NAMED COMPANY.

**Intech**

Intech House  
5 Newlands Court  
Attwood Road  
Burntwood  
Staffordshire  
WS7 3GF  
Tel: 01543 496600  
Fax: 01543 496601

Customer: SUNRISE RENEWABLES

Project: BARRY ACT

Title: TRAFFIC MOVEMENTS  
EXIT MOVEMENT FROM  
RECEPTION HALL

Drawn by:	JW	20.03.15	Checked:	KC	20.03.05	Scale:	1:500
Designed:	KDAM	20.03.15	Approved:	KC	20.03.15	Rev.	
Drawing number:	E1627-2102					Rev.	A

**DISCUSSION/COMMENT**