

**Proposed Drilling Site
Near Llancaiwan
Vale of Glamorgan**

**Noise Impact Assessment
3081/ENS1**

4th March 2013

For: **Mr Oliver Taylor**
Coastal Oil & Gas Ltd
First Floor Unit 9
Bridgend Business Centre
Bridgend
CF31 3SH
Email: otaylor@ntlworld.com



Henstaff Court Business Centre
Llantrisant Road, Pontyclun
Cardiff CF72 8NG

Tel: 02920 891 020

Email: info@hunteracoustics.co.uk

Hunter Acoustics is the trading name of Hunter Acoustics Ltd
Registered Office: Henstaff Court Business Centre, Llantrisant Road, Cardiff CF72 8NG
Registered Number: 4587925

Contents

- 1.0 Introduction3**
- 2.0 Planning Guidance3**
 - 2.1 Minerals Policy Statement 23
 - 2.2 World Health Organisation Guidance (residential receivers)3
- 3.0 Environmental Noise Survey4**
 - 3.1 Procedure4
 - 3.2 Equipment Used5
 - 3.3 Weather Conditions5
- 4.0 Results5**
- 5.0 Noise Predictions6**
 - 5.1 Noise Sensitive Properties6
 - 5.2 Predicted Noise Levels6
- 6.0 Good Practice Guide7**
- 7.0 Conclusion8**

1.0 Introduction

Coastal Oil & Gas Ltd is proposing to drill on land approximately 2.5km north of Llancarfan and 1km south of the A48 road. Drilling is proposed to take place 24 hours a day for approximately 6 weeks.

Hunter Acoustics have been commissioned to monitor background noise levels prior to the drilling taking place, in order to propose noise limits at critical noise sensitive premises.

Appendix A explains acoustic terminology used in this report.

2.0 Planning Guidance

2.1 Minerals Policy Statement 2

The Minerals Policy Statement 2 (MPS2) document gives the following guidance on noise limits for mineral extraction including gas:

- Daytime (0700-1900hrs) noise limits at noise-sensitive properties should be established at 10dB(A) above background levels* (subject to a maximum of 55dB(A) LAeq,1h).;
- Evening (1900-2200hrs) noise limits at NSPs should be established at 10dB(A) above background levels;
- Night-time noise limits at noise-sensitive dwellings should not exceed 42dB(A) LAeq,1h.

* Where it will be difficult not to exceed the background level by more than 10dB(A) without imposing unreasonable burdens on the mineral operator, the limit should be set as near that level as practicable and should not exceed 55dB(A)

MPS2 also recognises that when developing noise limits, some noisy short-term activities, which may otherwise be regarded as unacceptable, are unavoidable to facilitate minerals extraction.

2.2 World Health Organisation Guidance (residential receivers)

The World Health Organisation (WHO) 'Guidelines for Community Noise – 1999' quotes sleep disturbance limits in bedrooms at night of $L_{Aeq,8hr}$ 30dB(A).

3.0 Environmental Noise Survey


3.1 Procedure

Continuous noise monitoring was carried out over a 24-hour period starting 1500hrs on 26th February 2013 to determine existing background noise levels. Data including L_{max} , L_{eq} & L_{90} was logged at 5-minute intervals over the monitoring period.

Site plan 3081/SP1 shows the development site and the measurement position used;

Position A Located on the southern site boundary of the proposed drilling site, approximately 1.2 - 1.5m above local ground level. Background noise levels at this location are deemed representative of those at the nearest noise sensitive premises.

3081/SP1 - Site Plan Showing Monitoring Position

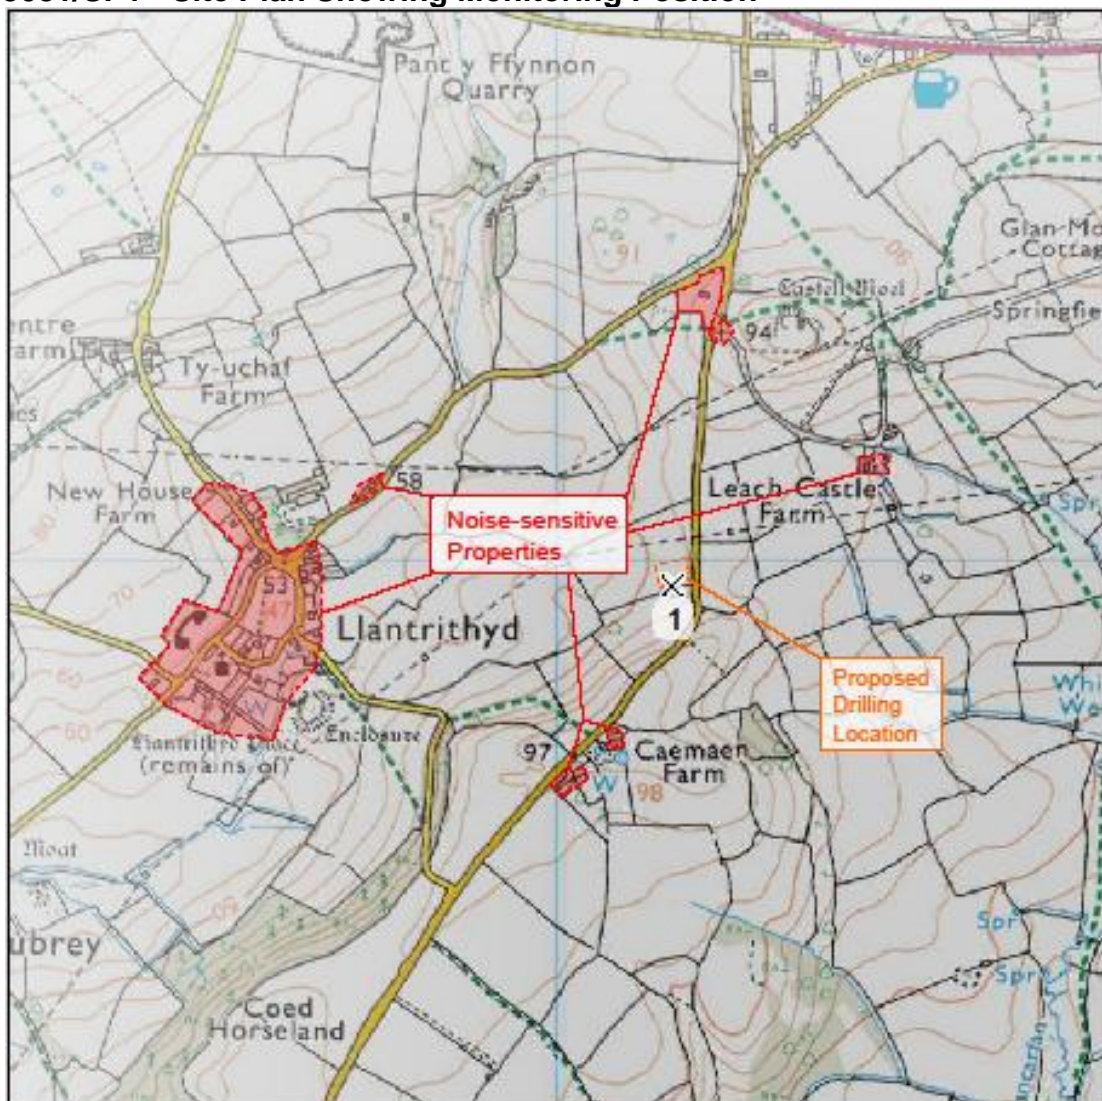

3.2 Equipment Used

The following equipment was used:

Make	Description	Model	Serial Number	Last Calibrated	Certificate No.
Norsonic AS	Type 1 - Integrating - averaging Sound Level Meter	140	1403003	07-Sep-11	U9668
Norsonic AS	Preamplifier	1209	12403	07-Sep-11	U9668
Norsonic AS	Microphone	1225	91797	06-Sep-11	9667
Norsonic AS	Calibrator (114.11dB @ 1001.90Hz)	1251	31826	14-Sep-12	U12037

The measurement systems were calibrated before and after the survey. No variation occurred.

3.3 Weather Conditions

Weather conditions during the survey were dry and mild with light winds.

4.0 Results

Time history graph 3081/TH1 shows L_{max} , L_{eq} & L_{90} sound pressure levels measured over consecutive 5-minute periods at position 1.

Period	Minimum Consistent L_{90}	Proposed Noise Limit
Daytime (0700-1900)	38.5dB(A)	48.5dB(A)
Evening (1900-2200)	32.7dB(A)	42.7dB(A)
Night (2200-0700)	25.1dB(A)	42dB(A)

Time history graph 3081/TH1 shows L_{max} , L_{eq} & L_{90} sound pressure levels measured over consecutive 5-minute periods at position A.

As the drill rig is proposed to operate 24 hrs/day during the 6 week period, night-time is the critical period when setting noise limits.

5.0 Noise Predictions

5.1 Noise Sensitive Properties

Locations of critical noise premises are shown in site plan 3081/SP1.

The critical noise sensitive premises appear to be houses and farms located approximately,

- 300m south (Caemaen Farm)
- 400m north-east (Leach Castle Farm)
- 450m north (Church/ Bonvilston Hall)
- starting 660m west (Llantrithyd village)

of the proposed drill site.

5.2 Predicted Noise Levels

The proposed drill rig has a typical noise level of 79 dB(A) at 1m – based on data included in an email from Oliver Taylor dated 21/01/2011 with manufacturer's specifications for a similar drill rig and our own measurements of a similar drill rig.

Taking a distance loss of,

- 300m south, the noise level of the drill rig at the residence is predicted to be approximately 39.0dB(A) L_{Aeq} .
- 400m north-east, the noise level of the drill rig at the residence is predicted to be approximately 36.5dB(A) L_{Aeq} .
- 450m north, the noise level of the drill rig at the residence is predicted to be approximately 35.5dB(A) L_{Aeq} .
- 660m west, the noise level of the drill rig at the residence is predicted to be approximately 32.2dB(A) L_{Aeq} .

Note: These predictions do not account for any soft ground absorption or screening losses that are likely to occur and can therefore be classed as a worst case prediction.

These levels meet the night-time limits set in MPS2.

Allowing for a 15dB loss through a partially open window should result in noise levels in bedrooms below the World Health Organisation (WHO) night-time sleep disturbance noise criteria of 30dB(A).

6.0 Good Practice Guide

The following advice is given with the aim of reducing noise associated with the drilling operations by means of good practice.

A summary of the practical measures in the choice and use of plant to reduce noise is given below:

- Avoid unnecessary revving of engines and switch off equipment when not required.
- Ensure plant and vehicles are properly maintained, check silencers and bearings.
- If the noise is directional, point the source away from noise-sensitive locations.
- Limit the use of particularly noisy plant or vehicles.
- Start up plant sequentially rather than together.
- Ensure plant is operated with noise control hoods closed.

7.0 Conclusion

Coastal Oil & Gas Ltd is proposing to drill on land approximately 2.5km north of Llancarfan and 1km south of the A48 road. Drilling is proposed to take place 24 hours a day for approximately 6 weeks.

Critical noise sensitive premises have been identified as shown on Site Plan 3081/SP1.


Background noise levels have been measured at a location that can be deemed to have a noise climate representative to that at the critical noise sensitive premises.

Noise limits have been proposed based on measured background noise levels and current planning guidance.

Predicted noise levels are indicated to fall below MPS2 night-time noise limits and the World Health Organisation (WHO) night-time sleep disturbance threshold criteria of 30dB(A) within bedrooms.

Noise limits and criteria should be confirmed acceptable with the local planning authority/EHO.

Prepared by:




Thomas Goose
MSc MIOA
Hunter Acoustics

Checked by:



Meirion Townsend
BSc(Hons) MIOA
Hunter Acoustics

3081/TH1 - Continuous Monitoring Time History at Position A

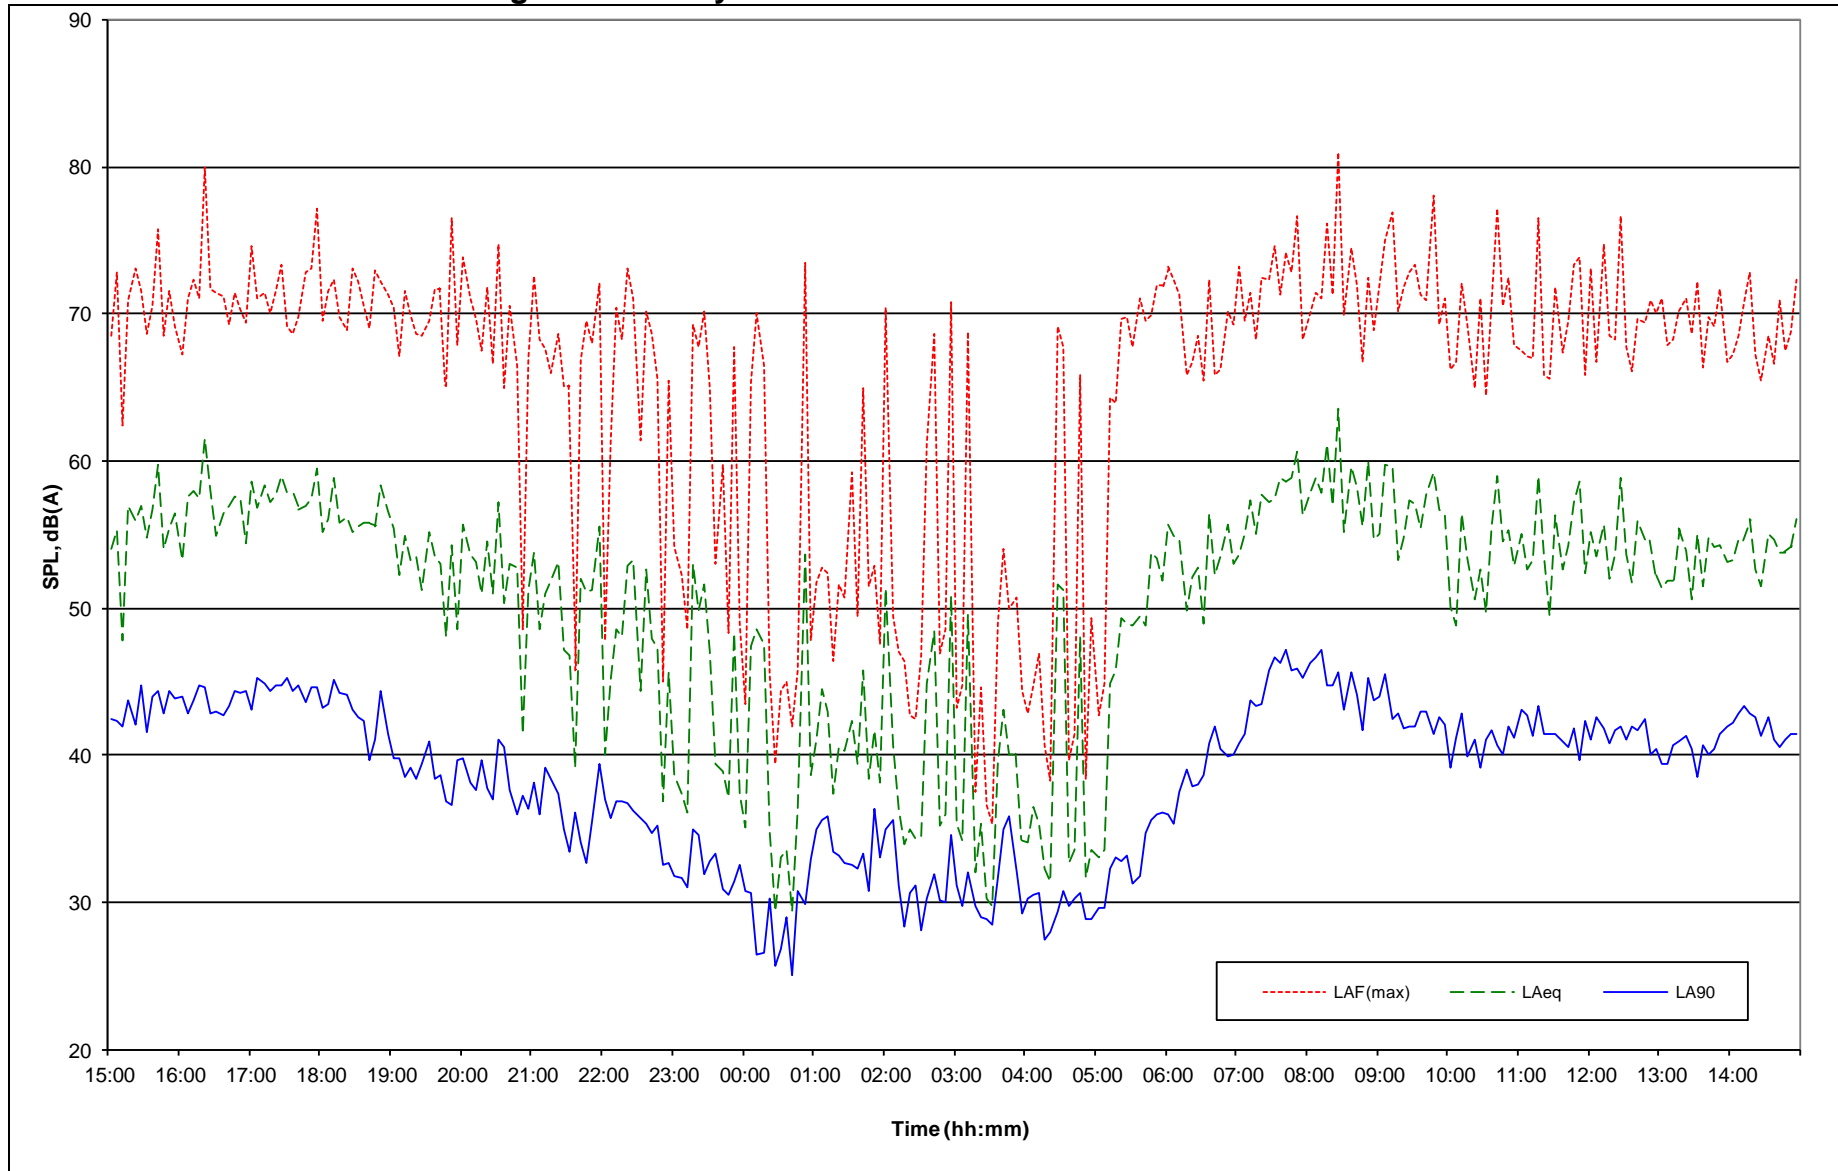

Appendix A

Acoustic Terminology

Human response to noise depends on a number of factors including; Loudness, Frequency content, and variations in level with time. Various frequency weightings and statistical indices have been developed in order to objectively quantify 'annoyance'. The following units have been used in this report:

dB(A): The sound pressure level weighted to correspond with the frequency response of the human ear, and therefore a persons subjective response to frequency content.

L_{eq}: The Equivalent continuous sound level is a notional steady state level which over a quoted time period would have the same acoustic energy content as the actual fluctuating noise measured over that period.

L₉₀: The sound level which is exceeded for 90% of the measurement period. i.e. The level exceeded for 54 minutes of a 1-hour measurement. It is often used to define the background noise level.

L₁₀: The sound level which is exceeded for 10% of the measurement period. i.e. The level exceeded for 6 minutes of a 1-hour measurement

SEL: 'Sound Exposure Level', The dB(A) level which, if it lasted 1 second, would produce the same sound energy as the event in question (e.g. a train pass-by).

L_{Ar,Tr}: Rating noise level is the specific noise level plus any adjustment for the characteristic features of the noise