



# ASHMORE


A single lap, interlocking double plain tile, with the engineered precision and ease of installation of an interlocking tile.

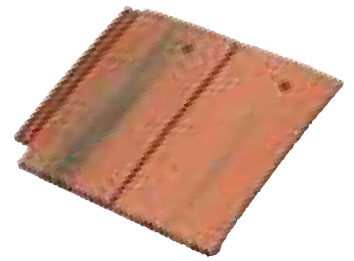


## COLOUR AVAILABILITY



Smooth Brown (S)



Smooth Grey (S)



Old English Dark Red (S)

Key  
(S) Smooth finish

## TECHNICAL DATA

Size of tile	267mm x 333mm
Minimum pitch*	25° (77mm headlap) 22.5° (92mm headlap)
Maximum pitch	90°
Minimum headlap	77mm
Maximum gauge	190mm
Tile thickness	16mm (nominal)
Cover width	302mm (nominal)
Hanging length	235mm (nominal)
Covering capacity (net)	17.5 tiles/m <sup>2</sup> at 77mm headlap 19 tiles/m <sup>2</sup> at 92mm headlap
Weight of tiling (approx.)	48kg/m <sup>2</sup> (0.47 kN/m <sup>2</sup> ) at 77mm headlap 52kg/m <sup>2</sup> (0.51 kN/m <sup>2</sup> ) at 92mm headlap
Battens required (net)	5.3 lin.m/m <sup>2</sup> at 77mm headlap 5.8 lin.m/m <sup>2</sup> at 92mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Fixings	45mm x 3.35mm slate nails
Fixing clips	Eaves, verge and tile clips
Authority	BS EN 490


\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY


- ✓ A<sup>+</sup> rated in the BRE Green Guide (based on generic rating for UK produced clay interlocking tiles Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 Responsible Sourcing certified

## ASHMORE FITTINGS


Available in all colours to match main tiles.



Ashmore three quarter tile (LH)



Ashmore three quarter tile (RH)



Ashmore tile-and-a-half

Ashmore tiles should be laid broken bond. The required broken bond pattern is created by the introduction of three-quarter width tiles in alternate courses. Tile-and-a-half tiles are available for use at hips and valleys.

Note: All measurements in mm.

# CONCRETE FITTINGS

## VERGES, RIDGES AND HIPS

Available in a range of colours to match main tiles. Recommended roof pitch may vary depending on product and system used, please contact the Technical Advisory Service.

Description	Cloak verge (Modern, Mendip and Double Roman, see page 56)	Modern ridge††*	Modern security ridge	Segmental ridge†*	Modern mono ridge
Pitch range	n/a	15-55° dry ridge	15-45° bedded	15-55° dry ridge	15-45° bedded
Description	Segmental security ridge	Segmental mono ridge†	Segmental mono block end ridge	Modern mono block end ridge	Third round hip tile‡§
Pitch range	15-50° bedded	15-55° dry ridge	115-55° dry ridge	15-45° bedded	17.5-45° dry ridge
Description	Segmental block end ridge*	Modern block end ridge*	90° Angle ridge/hip (Security 90° Angle also available)	125° Angle ridge/hip (Security 125° Angle also available)**	Pascoll roll baby ridge
Pitch range	15-55° dry ridge	15-55° dry ridge	45-50° bedded	15-25°	15-45°
Description	Half round baby ridge	Ridge vent terminal	Gas vent ridge terminal (Also available: Gas vent ridge for condensing boilers)		
Pitch range	15-55°	15-55° dry ridge	15-55° dry ridge		

§ Compatible with Marley Universal HipFast.

\* Compatible with Marley Universal RidgeFast.

\*\* Also available – 145° Angle ridge/hip and Security 145° Angle ridge/hip

Note: All measurements in mm.

† Compatible with Marley ventilated dry ridge system.

‡ Compatible with Marley dry hip system.