

Responsibility is not accepted for errors made by others in scaling from this drawing.
All construction information should be taken from figured dimensions only.

Legend

- Site boundary.
- Secure site boundary fencing, minimum 1.8m high. Weld mesh anti-climb fence, to Sbd standards e.g. Dulok double wire mesh fencing at 1830mm height, powder coated in black colour. With matching gates.
- Secondary secure fencing to playground zones. Weld mesh anti-climb fence, e.g. Dulok double wire mesh fencing at 1430mm height, powder coated in black colour. With matching gates.
- Fencing to refuse store and substation enclosure. Timber hit and miss fencing, with concrete support posts. Minimum 2400mm high. With matching gates. Roof not included.
- Fencing to MUGA. Weld mesh anti-climb fence, to Sbd standards e.g. Dulok double wire mesh fencing at 3000mm height, powder coated in black colour. With matching gates.
- Existing fence to habitat area to be retained, including gate access.
- Bollards.
Refer to drawing SNPS-STL-XX-DR-L-9002 Hard Landscape Plan for details.

- G1** Lockable pedestrian gate. Single leaf gate, min. 1.2m clear opening.
- G2** Lockable vehicular gate. Double leaf gate, min. 6.0m clear opening.
- G3** Lockable vehicular gate. Double leaf gate, min. 6.0m clear opening.
- G4** Lockable pedestrian gate. Single leaf gate, min. 1.2m clear opening.
- G5** Lockable maintenance gate to Bin Store enclosure. Double leaf gate, min. 2.0m clear opening.
- G6** Lockable maintenance gate to Substation. Double leaf gate, min. 2.4m clear opening.
- G7** Lockable maintenance gate to Plant. Double leaf gate, min. 2.0m clear opening.
- G8** Lockable pedestrian/ maintenance gate to Habitat area. Double leaf gate, min. 2.4m clear opening.
- G9** Lockable maintenance gate. Double leaf gate, min. 2.4m clear opening.
- G10** Lockable maintenance gate to Sprinkler tank. Double leaf gate, min. 2.0m clear opening.
- G11** Lockable pedestrian/ maintenance gate to Habitat area. Double leaf gate, min. 2.4m clear opening.
- G12** Lockable pedestrian/ maintenance gate. Double leaf gate, min. 2.4m clear opening.
- G13** Lockable pedestrian/ maintenance gate. Double leaf gate, min. 2.4m clear opening.
- G14** Lockable pedestrian/ maintenance gate. Double leaf gate, min. 2.4m clear opening.
- G15** Pedestrian/ maintenance gate. Double leaf gate, min. 1.2m clear opening.
- G16** Lockable pedestrian/ maintenance gate. Double leaf gate, min. 2.4m clear opening.
- G17** Lockable pedestrian gate. Single leaf gate, min. 1.2m clear opening.
- G18** Lockable maintenance gate. Double leaf gate, min. 2.4m clear opening.
- G19** Lockable pedestrian gate. Single leaf gate, min. 1.2m clear opening.

| PL | REV | DATE | DESCRIPTION |
|----|------|----------|---|
| PL | PL07 | 30/09/20 | Updated anotation and planting for planning |
| PL | PL06 | 17/09/20 | Highways input update for discharge of conditions |
| PL | PL05 | 11/09/20 | For discharge of conditions |
| PL | PL04 | 09/09/20 | Amended for Planning Issue |
| S4 | P01 | 07/06/20 | For Stage 3 Issue |
| PL | PL03 | 25/06/20 | For Planning |
| PL | PL02 | 15/06/20 | PAC Submission |
| PL | PL01 | 12/06/20 | PAC Submission |


| STATUS | REV | DATE | DESCRIPTION | REVISED BY |
|---------------------------|-----|------|-------------|---------------|
| CLIENT | | | | CCM |
| Vale of Glamorgan Council | | | | CHECKED BY |
| | | | | CS |
| | | | | ORIGINATOR NO |
| | | | | 152853 |

CONSULTANT
STRIDE TREGLOWN
www.stridetreglow.com © Stride Treglow Limited 2020
 PROJECT
St Nicholas Primary School

DRAWING TITLE
Fencing and Site Security Plan

STATUS CODE
PL : Authorized and accepted SCALE
1 : 500@A1

DRAWING USAGE:
 PROJECT - ORIGINATOR - VOLUME - LEVEL - TYPE - ROLE - CLASS - NUMBER STATUS_REVISION
SNPS-STL-XX-XX-DR-L-9004 PL_PL07

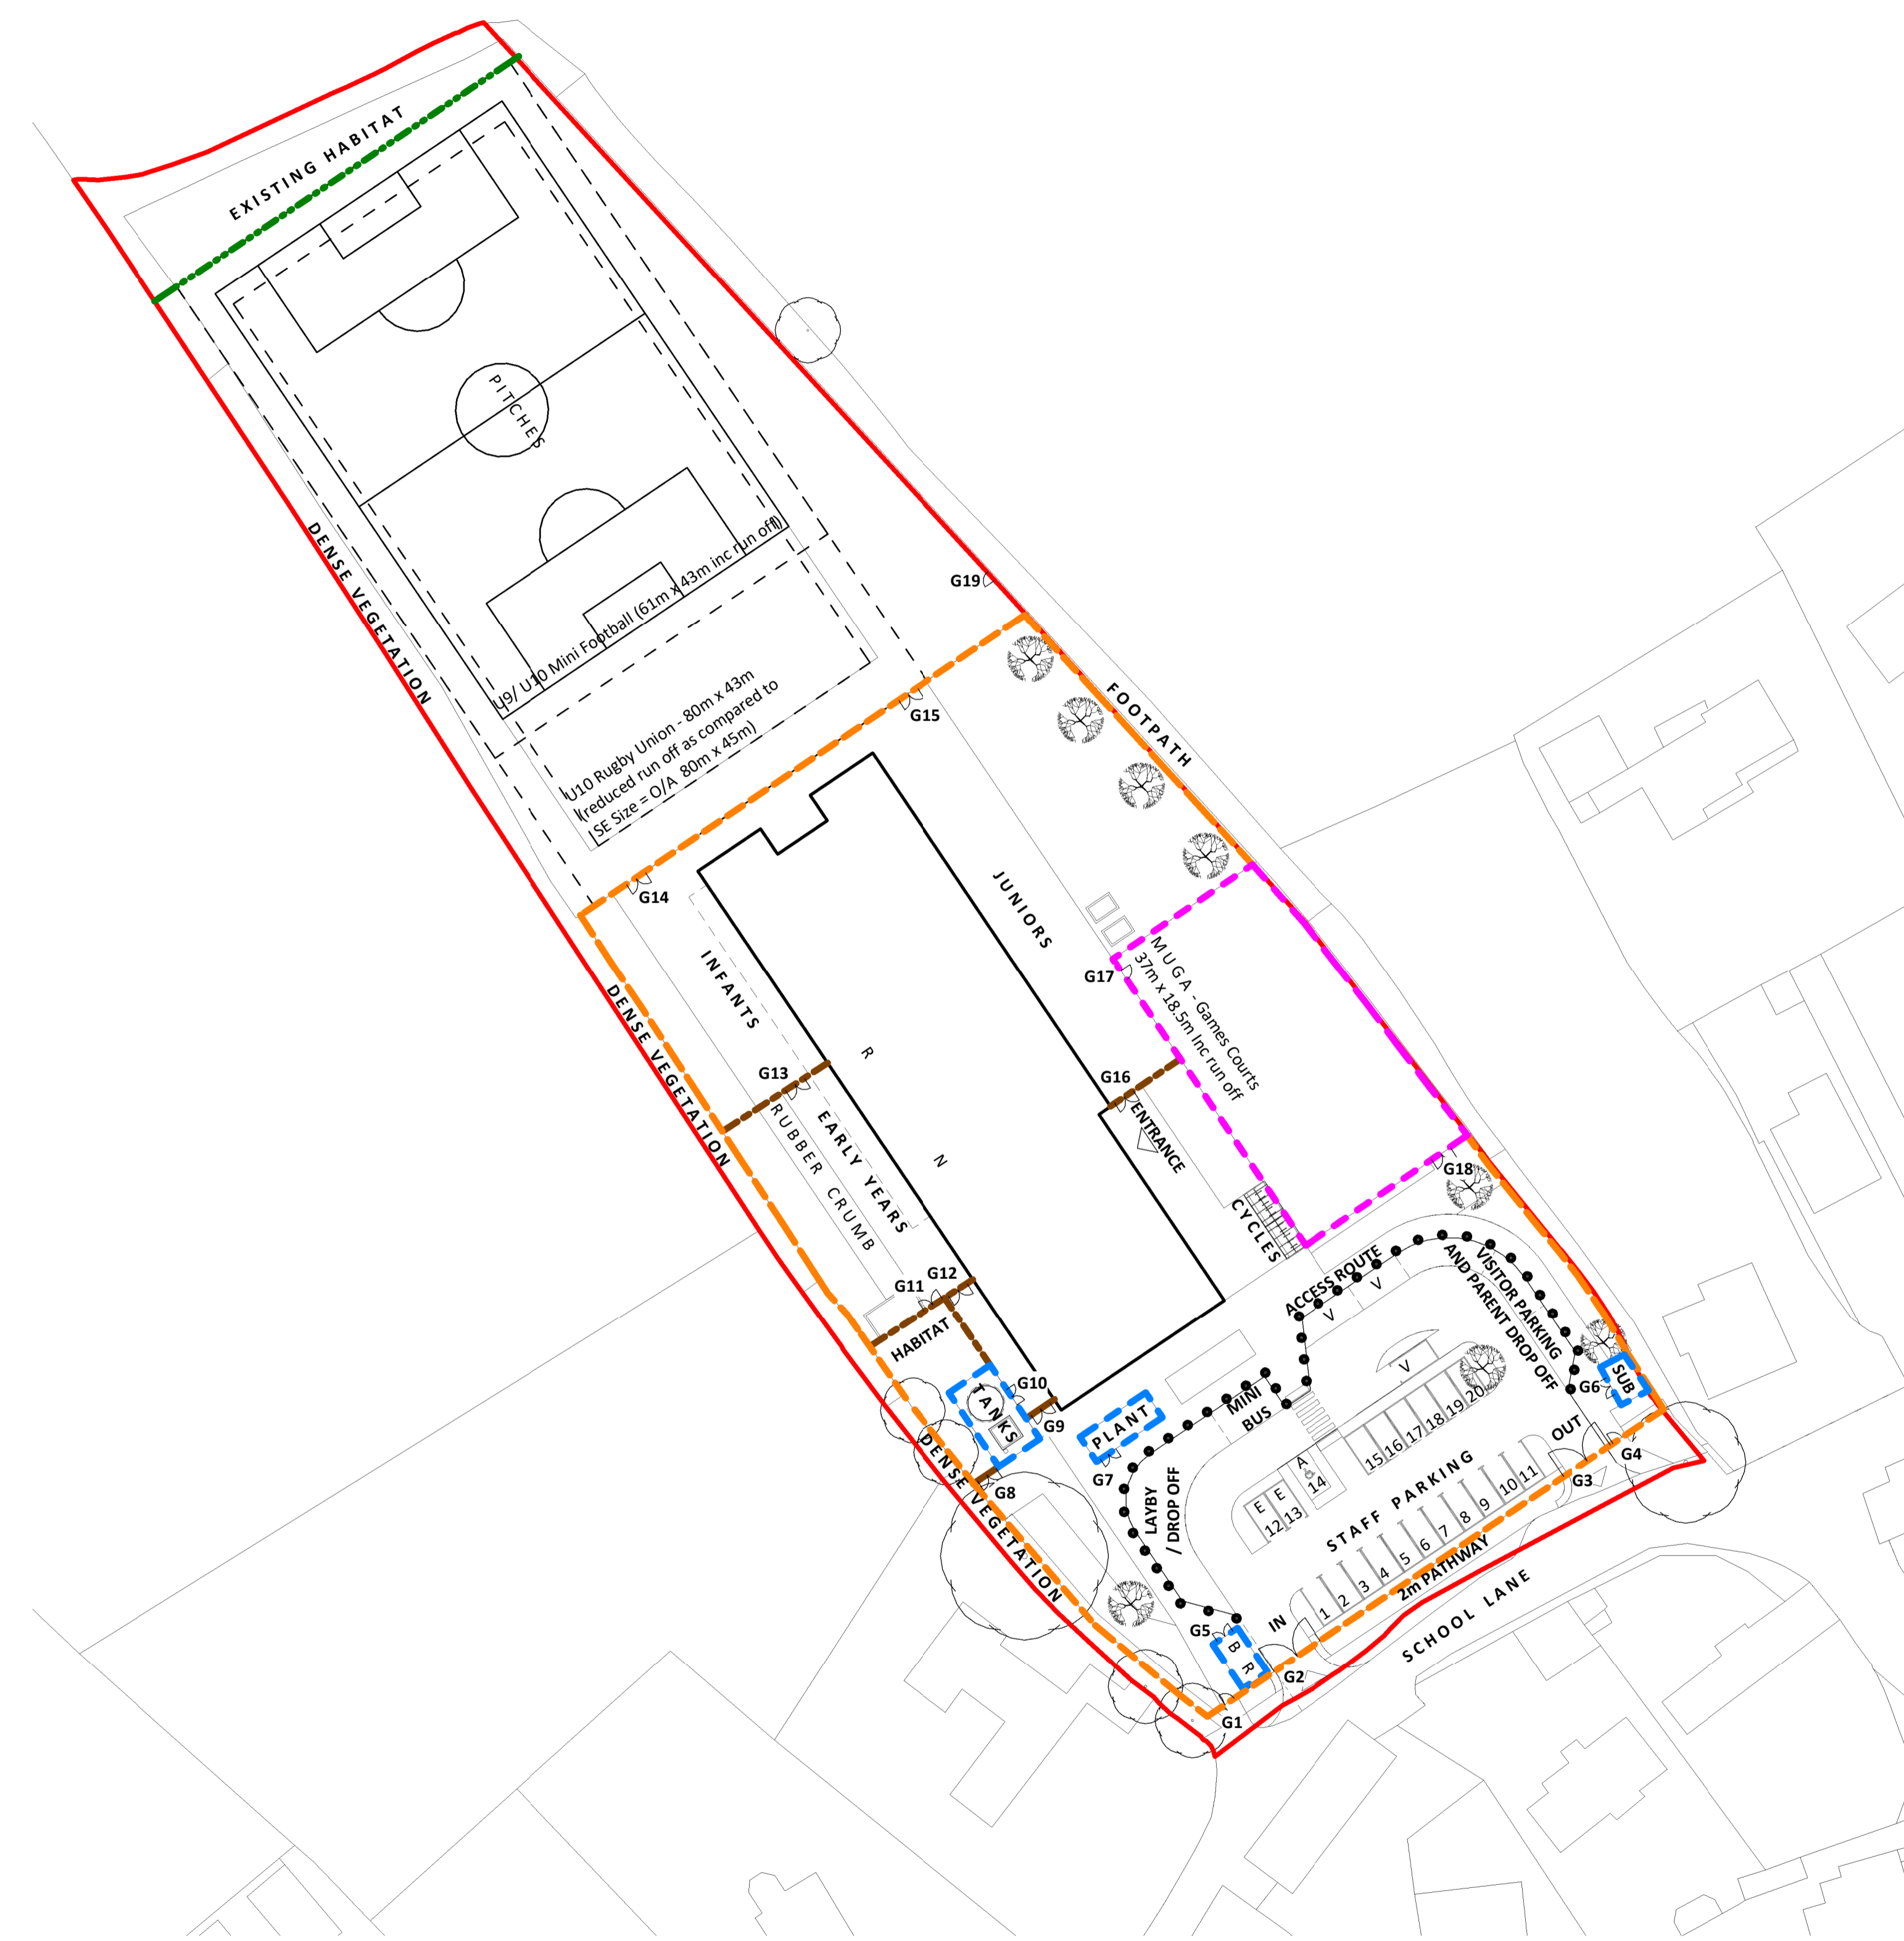

Fencing and Site Security Plan
 1 : 500