


ISO A1 594mm x 841mm
Approved: RM
Checked: ATZ
Designer: KP
Project Management Initials:
Last saved by: JONATHAN BLISSETT (2021-03-03) - Last Printed: 2021-07-09
Filename: P:\PROJECTS\HIGHWAY 9 - LLANMAES FLOOD ALLEVIATION SCHEME\5.0 CADD\5.3 DRAWINGS\SERIES 0200 - SITE_CLEARANCE\60509148-ACM-SHT-30-0200-CT-0201-0208.DWG

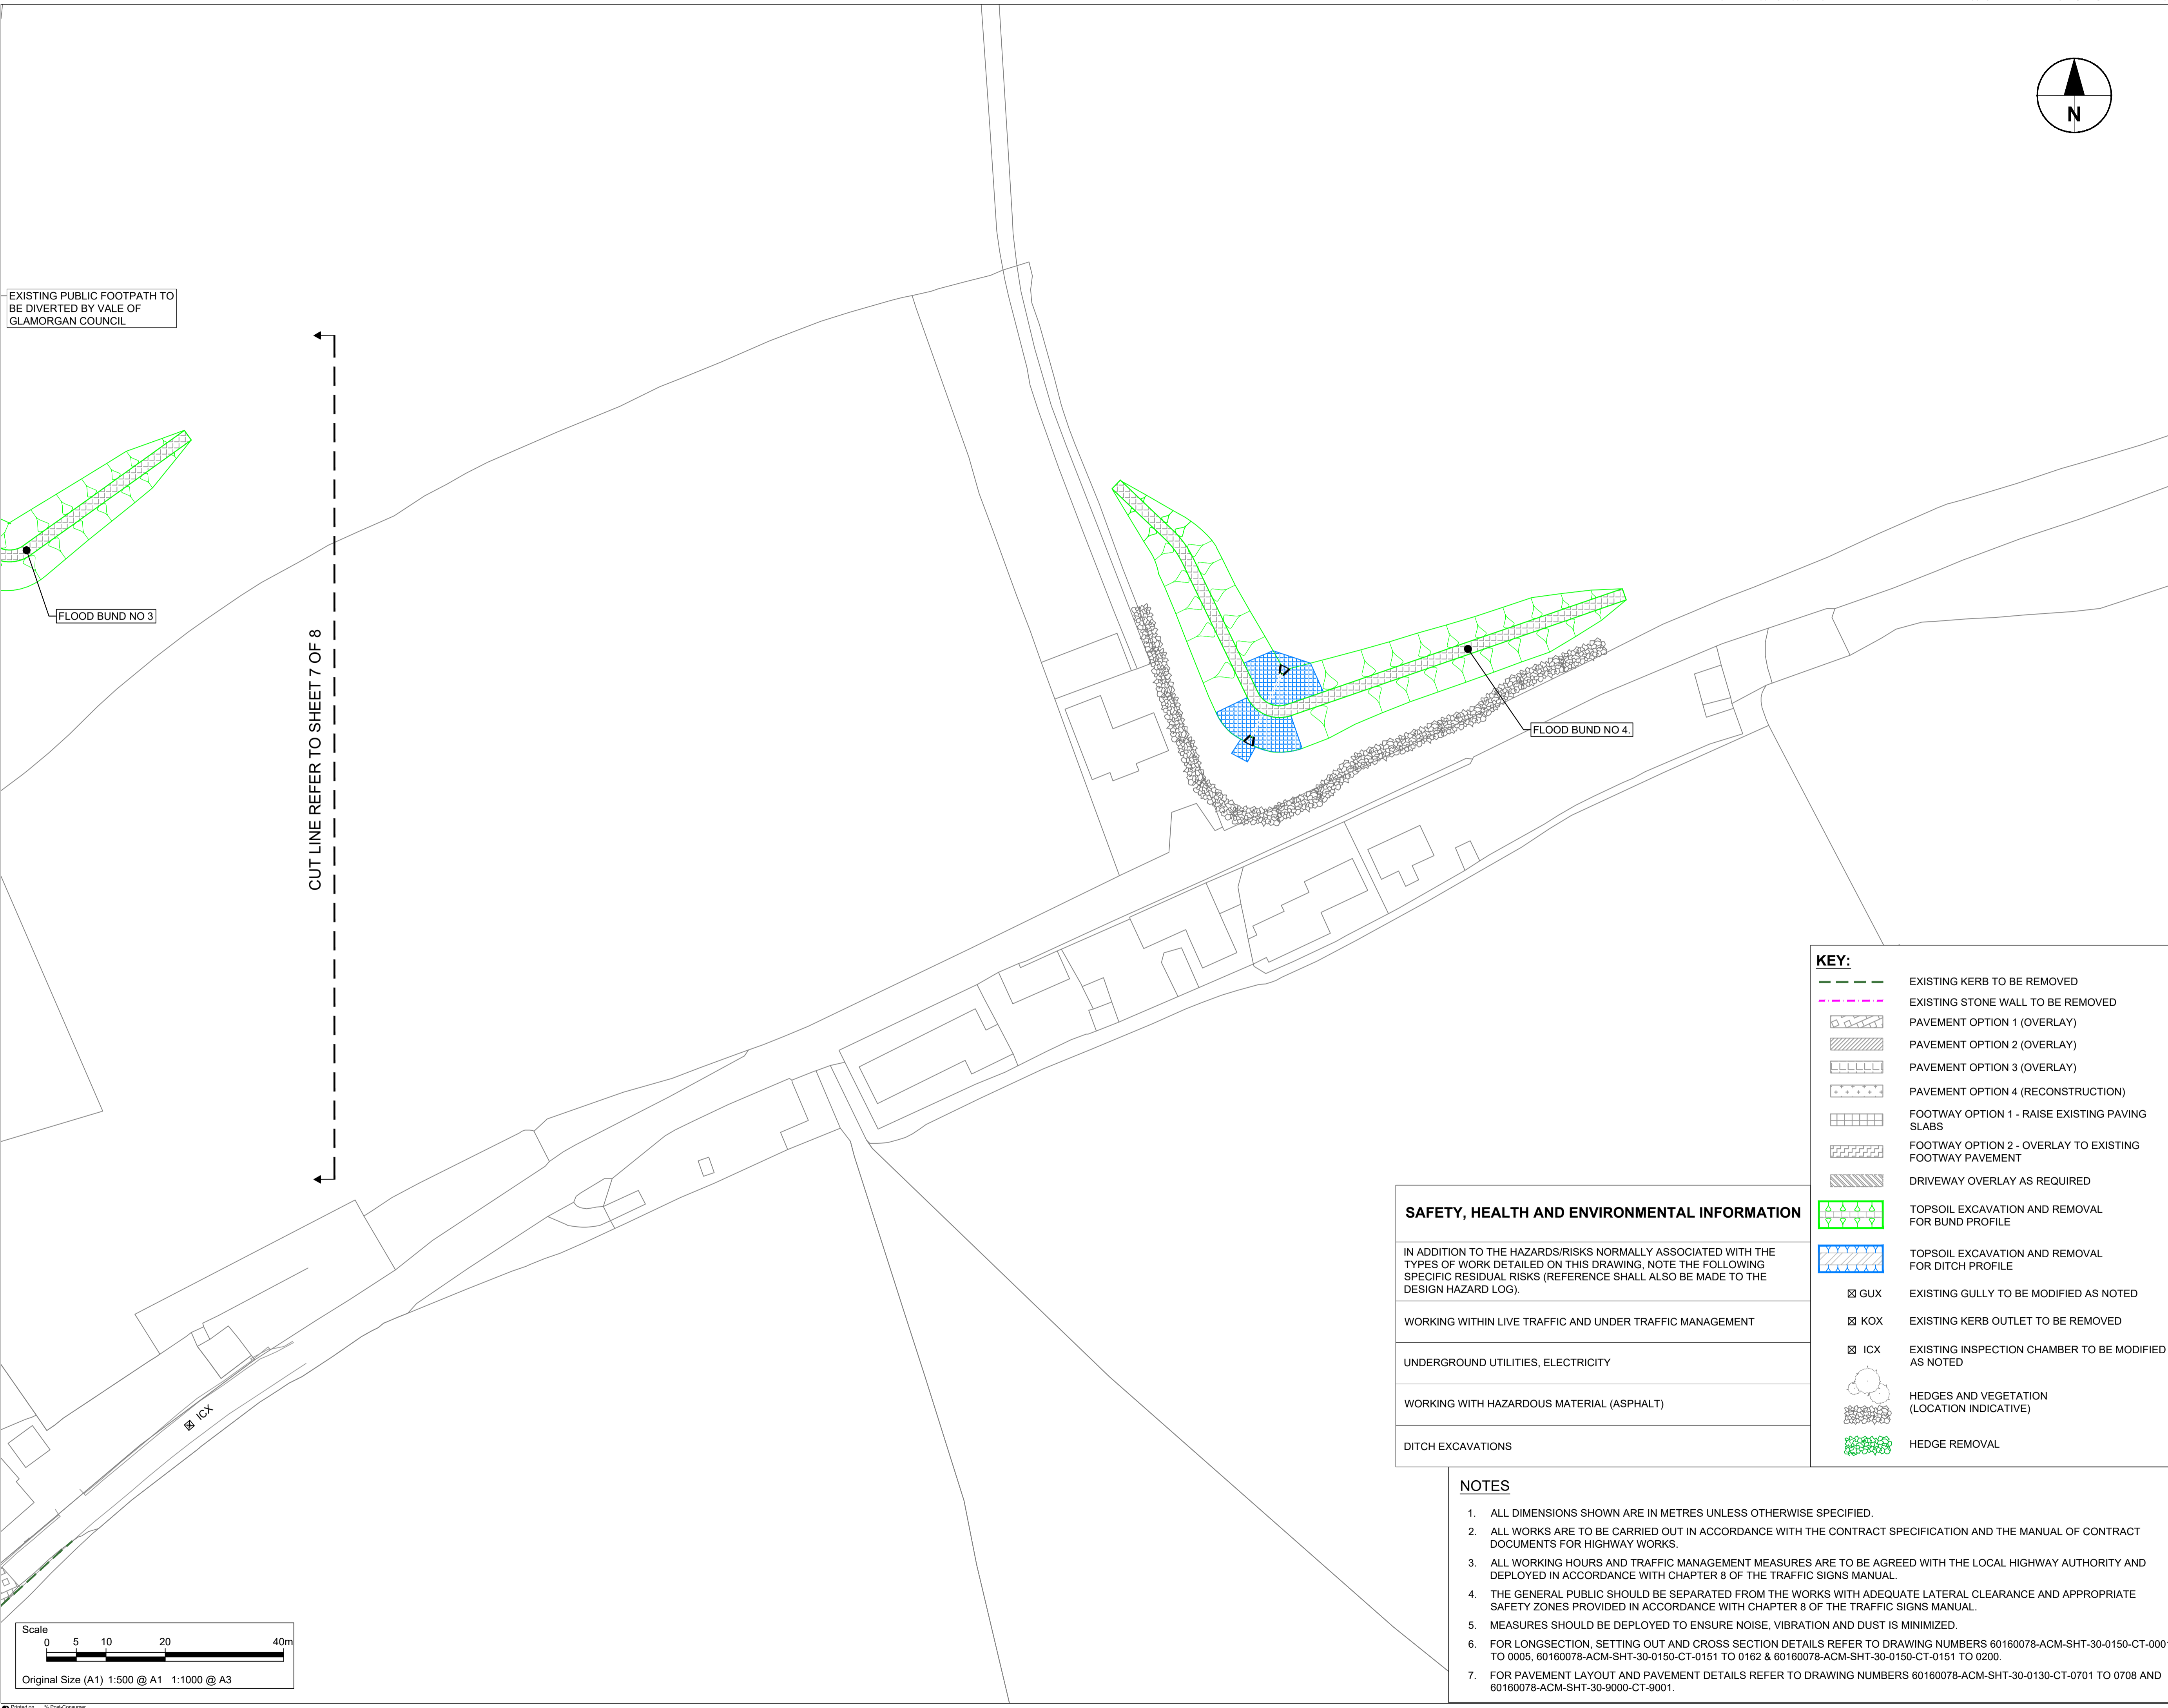

EXISTING PUBLIC FOOTPATH TO BE DIVERTED BY VALE OF GLAMORGAN COUNCIL

FLOOD BUND NO 3

CUT LINE REFER TO SHEET 7 OF 8

FLOOD BUND NO 4

KEY:

	EXISTING KERB TO BE REMOVED
	EXISTING STONE WALL TO BE REMOVED
	PAVEMENT OPTION 1 (OVERLAY)
	PAVEMENT OPTION 2 (OVERLAY)
	PAVEMENT OPTION 3 (OVERLAY)
	PAVEMENT OPTION 4 (RECONSTRUCTION)
	FOOTWAY OPTION 1 - RAISE EXISTING PAVING SLABS
	FOOTWAY OPTION 2 - OVERLAY TO EXISTING FOOTWAY PAVEMENT
	DRIVEWAY OVERLAY AS REQUIRED
	TOPSOIL EXCAVATION AND REMOVAL FOR BUND PROFILE
	TOPSOIL EXCAVATION AND REMOVAL FOR DITCH PROFILE
	EXISTING GULLY TO BE MODIFIED AS NOTED
	EXISTING KERB OUTLET TO BE REMOVED
	EXISTING INSPECTION CHAMBER TO BE MODIFIED AS NOTED
	HEDGES AND VEGETATION (LOCATION INDICATIVE)
	HEDGE REMOVAL

SAFETY, HEALTH AND ENVIRONMENTAL INFORMATION

- IN ADDITION TO THE HAZARDS/RISKS NORMALLY ASSOCIATED WITH THE TYPES OF WORK DETAILED ON THIS DRAWING, NOTE THE FOLLOWING SPECIFIC RESIDUAL RISKS (REFERENCE SHALL ALSO BE MADE TO THE DESIGN HAZARD LOG).
- WORKING WITHIN LIVE TRAFFIC AND UNDER TRAFFIC MANAGEMENT
- UNDERGROUND UTILITIES, ELECTRICITY
- WORKING WITH HAZARDOUS MATERIAL (ASPHALT)
- DITCH EXCAVATIONS

NOTES


- ALL DIMENSIONS SHOWN ARE IN METRES UNLESS OTHERWISE SPECIFIED.
- ALL WORKS ARE TO BE CARRIED OUT IN ACCORDANCE WITH THE CONTRACT SPECIFICATION AND THE MANUAL OF CONTRACT DOCUMENTS FOR HIGHWAY WORKS.
- ALL WORKING HOURS AND TRAFFIC MANAGEMENT MEASURES ARE TO BE AGREED WITH THE LOCAL HIGHWAY AUTHORITY AND DEPLOYED IN ACCORDANCE WITH CHAPTER 8 OF THE TRAFFIC SIGNS MANUAL.
- THE GENERAL PUBLIC SHOULD BE SEPARATED FROM THE WORKS WITH ADEQUATE LATERAL CLEARANCE AND APPROPRIATE SAFETY ZONES PROVIDED IN ACCORDANCE WITH CHAPTER 8 OF THE TRAFFIC SIGNS MANUAL.
- MEASURES SHOULD BE DEPLOYED TO ENSURE NOISE, VIBRATION AND DUST IS MINIMIZED.
- FOR LONGSECTION, SETTING OUT AND CROSS SECTION DETAILS REFER TO DRAWING NUMBERS 60160078-ACM-SHT-30-0150-CT-0001 TO 0005, 60160078-ACM-SHT-30-0150-CT-0151 TO 0162 & 60160078-ACM-SHT-30-0150-CT-0151 TO 0200.
- FOR PAVEMENT LAYOUT AND PAVEMENT DETAILS REFER TO DRAWING NUMBERS 60160078-ACM-SHT-30-0130-CT-0701 TO 0708 AND 60160078-ACM-SHT-30-9000-CT-9001.

STATUS

DETAILED DESIGN

ISSUE/REVISION

NO	DATE	DESCRIPTION
C	07/07/2021	FOR PRICING
B	26/02/2021	DETAILED DESIGN
A	16/12/2020	DRAFT DETAILED DESIGN

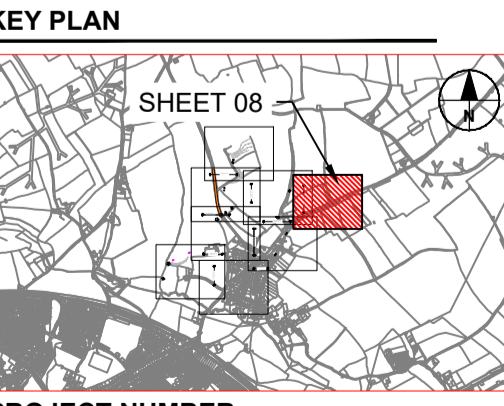

PROJECT NUMBER
60160078

SHEET TITLE
LLANMAES VILLAGE
FLOOD ALLEVIATION SCHEME
SITE CLEARANCE PLAN
SHEET 8 OF 8

SHEET NUMBER
60160078-ACM-SHT-30-0200-CT-0208

