

Arboricultural Method Statement to BS5837:2012

HSP Consulting Engineers Limited

**Cardiff and Vale College Advanced Technology Centre,
Land off Port Road,
Vale of Glamorgan,
Cardiff
CF62 3BD**

05 April 2024

Emily Kempson BSc (Hons) Dip Arb L4 (ABC)

Table of Contents

1. Introduction	3
2. Executive Summary.....	3
3. General Information	5
4. Tree Survey	6
5. Arboricultural Impact Assessment.....	7
6. Arboricultural Method Statement.....	9
Tree Works.....	10
Protected Species	14
Sequencing of works.....	16
Protective Measures.....	17
Construction.....	21
Prohibition.....	22
Site Management	23
Services.....	24
Landscaping.....	26
Monitoring and Supervision.....	27
Appendix 1: Tree Survey Schedule	29
Appendix 2: Tree Protection Notice.....	40
Appendix 3: Contact Details.....	42
Document Production Record.....	43

1. Introduction

Arbtech Consulting Limited (Arbtech) received written instruction on 16 October 2023 from HSP Consulting Engineers Limited on behalf of WEPCo to attend Cardiff and Vale College Advanced Technology Centre, land off Port Road, Vale of Glamorgan, CF623BD; grid reference, ST 07477 67666 (site) to undertake an arboricultural survey to BS5837:2012 guidance to assess trees, hedges and major shrub groups growing on and within influencing distance of the site and to produce a Schedule of Trees, Tree Constraints Plan. Arbtech received further instruction on 13 December 2023 to produce an Arboricultural Impact Assessment, Arboricultural Method Statement and Tree Protection Plan.

2. Executive Summary

This report describes the extent and effect of the proposed development at Cardiff Airport Technology College site, land off Port Road, Vale of Glamorgan, CF623BD (“site”) on individual trees and groups of trees within and adjacent to the site.

Trees within the site were surveyed; using a methodology guided by British Standard 5837:2012 ‘Trees in relation to design, demolition and construction – Recommendations’ (“BS5837”).

Subsequently, this report has been produced, balancing the layout of the proposed development against the competing needs of trees. This report comprises all of the requisite elements of an arboricultural implications assessment, method statement and supporting plans.



Figure 1: Aerial Image of site with approximate red line boundary area surveyed (Google Earth)

Checklist for Submission to Local Planning Authority

Tree survey	✓
Tree constraints plan	✓
Arboricultural impact assessment	✓
Arboricultural method statement	✓
Tree protection plan	✓

This report and its appendices follow precisely the strategy for arboricultural appraisal intended to provide local planning authorities with evidence that trees have been properly considered throughout the development process.

It is the conclusion of this report that the overall quality and longevity of the amenity contribution provided for by the trees and groups of trees within and adjacent to the site will not be adversely affected as a result of the local planning authority consenting to the proposed development. It is considered that any issues raised in this report, or beyond the scope of it can be dealt with by planning conditions.

3. General Information

Client: HSP Consulting Engineers Ltd.

Site: Cardiff and Vale College Advanced Technology Centre, land off Port Road, Vale of Glamorgan, CF623BD

Brief proposal description: Construct a college site with associated parking

Planning application reference: N/A

Table 1: Documents referred to.

Document	Reference No.
Topographical survey drawing	26417swg-01_06
Proposed layout drawing	VG0101-ALA-00-XX-DR-L-00002 Rev P08 Landscape General Arrangement
Planting Strategy	VG0101-ALA-00-XX-DR-L-00010 P05
British Standard 5837:2012	“BS5837”
Arboricultural Impact Assessment	Arbtech AIA 01A
Tree Protection Plan	Arbtech TPP 01A

4. Tree Survey

Survey: An arboricultural survey to BS5837 of all trees within impacting distance of the site was undertaken by Thomas Ramm on 22 October 2023.

A total of 38No individual trees and 8No groups of trees were surveyed. Details for each of the trees surveyed are provided in the Schedule of Trees (see Appendix 1).

Table 2: Documents upon which this tree survey has been based.

Document	Originator	Reference Number	Title
Survey Base Drawing	Survey Solutions	26417swg-01_06	Port Road Cardiff

Limitations: The survey was made at ground level using visual observation only. Detailed examinations, such as climbing inspections and decay detection equipment were not employed, though may form part of the survey’s management recommendations. Measurements were taken using specialist tapes, laser and GPS devices. Where this was not possible, measurements are estimated.

Scope: Pre-development tree surveys make arboricultural management recommendations based exclusively upon the individual tree or group of trees condition relative to their present context (*i.e., not in relation to the proposed development*).

Legal Status: No statutory protection check has been performed. BS5837 does not draw any distinction between trees subject to statutory protection, such as a Tree Preservation Order (“TPO”), and those trees without. This is principally because a detailed planning consent overrides any TPO protection. Consequently, we do not seek to offer any comparison between or infer any difference in the quality or importance of TPO trees and other trees.

* For more information on the surveyed trees please see Arbtech Consulting Ltd, Tree Survey Schedule (Appendix 1), Tree Survey Report and Tree Constraints Plan.

5. Arboricultural Impact Assessment

Table 3: Documents upon which this assessment has been based.

Document	Originator	Reference Number	Title
Survey Base Drawing	Survey Solutions	26417swg-01_06	Port Road Cardiff
Site Plan	Ares Landscape Architects	VG0101-ALA-00-XX-DR-L-00002 Rev P08	Landscape General Arrangement
Planting Plan	Ares Landscape Architects	VG0101-ALA-00-XX-DR-L-00010 Rev P05	Planting Strategy
Utilities	Arup	VG0101-ARP-ZZ-00-DR-C-00071 Rev P01	Proposed Utilities

There are a number of issues that may need to be addressed in an arboricultural impact assessment between the trees and the proposed development, these are as follows:

- The effect and extent of the proposed development within the root protection areas (RPAs) of retained trees;
- The potential conflicts of the proposed development with canopies of retained trees; and
- The likelihood of any future remedial works to retained trees beyond which would have been scheduled as a part of usual management.

The proposed scheme does not result in any impact to trees to be retained.

Trees to be removed

A total of 31No. individual trees, 1No. group and 3No partial groups require removal to facilitate the proposed scheme.

A breakdown of all tree removals and pruning works can be seen in Table 7: Summary of Tree Works

Table 4: Number of individual trees to be removed.

U	A	B	C
2	0	2	27

Table 5: Number of groups to be removed.

U	A	B	C
0 (0)	0 (0)	1 (2)	0 (1)

() = partial removal of a group

Canopy cover is ecologically important and the loss of canopy cover by these trees will be mitigated with planting within the development. The Planting Strategy Plan by Ares Landscape Architects provides details on the location and specification of new planting as part of the scheme, which seeks to offer an improvement on the existing landscaping situation.

6. Arboricultural Method Statement

The purpose of this method statement is to demonstrate how any aspect of the development that has potential to result in loss or damage to a tree may be implemented and provide an adequate level of protection for those trees that are to be retained during the proposed works.

Details of key site personnel, including site / project manager will be submitted to the Council’s Tree Officer prior to the commencement of site works.

This method statement is to be approved and agreed to in writing by all key personnel prior to the commencement of site works.

No site personnel are to be present and no demolition, site clearance, building work or delivery of materials is to occur until the protective measures are in accordance with this method statement and the Tree Protection Plan drawing number Arbtech TPP 01.

Protective measures should be in accordance with this method statement and the Tree Protection Plan; drawing number Arbtech TPP 01 will remain unaltered and in situ, unless otherwise specified, for the entire duration of the construction.

Table 6: Documents upon which this assessment has been based.

Document	Originator	Reference Number	Title
Survey Base Drawing	Survey Solutions	26417swg-01_06	Port Road Cardiff
Site Plan	Ares Landscape Architects	VG0101-ALA-00-XX-DR-L-00002 Rev P08	Landscape General Arrangement
Planting Plan	Ares Landscape Architects	VG0101-ALA-00-XX-DR-L-00010 Rev P05	Planting Strategy
Utilities	Arup	VG0101-ARP-ZZ-00-DR-C-00071 Rev P01	Proposed Utilities

Tree Works

For reasons of public safety, all tree works referred to herein must be carried out prior to any site personnel commencing works or any building materials being delivered.

Table 7: Summary of Tree Works.

No.	Species	Works	Category
T07	Common Ash	Fell to ground level, remove stump	U
T08	Field Maple	Fell to ground level, remove stump	C1
T09	Silver Birch	Fell to ground level, remove stump	C12
T10	Silver Birch	Fell to ground level, remove stump	B12
T11	Silver Birch	Fell to ground level, remove stump	C12
T12	Silver Birch	Fell to ground level, remove stump	C12
T13	Silver Birch	Fell to ground level, remove stump	C12
T14	Field Maple	Fell to ground level, remove stump	C12
T15	Goat Willow	Fell to ground level, remove stump	C12
T16	Silver Birch	Fell to ground level, remove stump	C12
T17	Silver Birch	Fell to ground level, remove stump	C12
T18	Silver Birch	Fell to ground level, remove stump	C12
T19	Silver Birch	Fell to ground level, remove stump	C12
T20	Silver Birch	Fell to ground level, remove stump	C12
T21	Silver Birch	Fell to ground level, remove stump	C12
T22	Silver Birch	Fell to ground level, remove stump	C12
T23	Silver Birch	Fell to ground level, remove stump	C12
T24	Field Maple	Fell to ground level, remove stump	C1
T25	Silver Birch	Fell to ground level, remove stump	C12
T26	Silver Birch	Fell to ground level, remove stump	C12
T27	Silver Birch	Fell to ground level, remove stump	C12
T28	Silver Birch	Fell to ground level, remove stump	U
T29	Silver Birch	Fell to ground level, remove stump	C12

No.	Species	Works	Category
T30	Silver Birch	Fell to ground level, remove stump	C12
T31	Field Maple	Fell to ground level, remove stump	B12
T32	Silver Birch	Fell to ground level, remove stump	C12
T33	Silver Birch	Fell to ground level, remove stump	C12
T34	Silver Birch	Fell to ground level, remove stump	C12
T35	Silver Birch	Fell to ground level, remove stump	C12
T36	Silver Birch	Fell to ground level, remove stump	C12
T37	Silver Birch	Fell to ground level, remove stump	C12
G01	Various	Partial fell: area as shown on the AIA plan.	B12
G02	Various	Fell to ground level, remove stumps	B12
G03	Various	Partial fell: area as shown on the AIA plan.	C12
G04	Various	Partial fell: area as shown on the AIA plan.	B12

Notes

All tree work is to be undertaken in accordance with British Standard BS 3998:2010, Recommendations for tree work. All arising's are to be removed and the site is to be left as found. Care is to be taken of the ground around retained trees to make sure that it does not become compacted as a result of tree surgery operations. No equipment or vehicles such as timber Lorries, tractors, excavators or cranes shall be parked or driven beneath the crowns of any retained trees, to prevent subsequent compaction and root death.

Tree removal

A tree should be felled in one piece only when there is no significant risk of damage to people, property or protected species (see Annex A).

Where restrictions (e.g., lack of space, buildings, other features, land ownership or use, or other trees which are to be retained) cannot be overcome, trees should be dismantled in sections.

This also applies where a tall stump is being retained but where branches are to be removed/pruned.

Extensively decayed trees can be unpredictable when they are being felled, and special precautions should therefore be taken, such as the use of a winch to guide the direction of fall.

Stump removal – stump grinding

Stump grinding should be to a minimum of 300mm deep or to extend through the base of the stump leaving the major roots disconnected if the intention is to reduce the potential for the spread of Honey fungus.

The grinding residue should be treated as arising's and removed from site.

NOTE: Mechanical destruction of a stump-by-stump grinding is less disruptive to the site than digging out.

The hole left by stump removal, should be filled with soil or other material. The filling should be appropriate for future site usage, and for any surface treatment that is to be installed.

Where future plant growth is desired, the backfill material should be firmed in 150 mm layers by treading, avoiding excessive compaction and destruction of the soil structure.

Stump removal - digging

Stump removal by digging out should include disposal/utilisation of woody material (see Clause **13**).

NOTE: Whether done by hand or machine, digging out can cause severe disturbance of the site.

Where possible, when winching out a stump, a ground or other type of anchor should be used rather than a tree to be retained. If there is no alternative to using such a tree as an anchor, appropriate protective measures should be adopted.

After stump removal

The hole left by stump removal, whether by digging out or grinding, should be filled with soil or other material. The filling should be appropriate for future site usage and for any surface treatment that is to be installed.

Where future plant growth is desired, the back fill material should be firmed in 150mm layers by treading, avoiding excessive compaction and destruction of the soil structure.



Protected Species

Conservation Status of British Bats

The general consensus in Britain and Europe is that virtually all bat species are declining and vulnerable. Our understanding of population status is poor as there is very little historical data for most bat species. Certain species, such as the horseshoe bats, are better understood and have well documented contractions in range and population size.

Given this general picture of decline in UK Government within the UK Biodiversity Action Plan has designated five species of bats as priority species (greater and lesser horseshoe bats, barbastelle, Bechstein's and pipistrelle). These plans provide an action pathway whereby the maintenance and restoration of the former populations levels are investigated.

Legal Status of British Bats

Given the above position all British bats as well as their breeding sites and resting places enjoy national and international protection.

All bat species in the UK are fully protected under the Wildlife and Countryside Act 1981 (as amended) through inclusion in Schedule 5. All bats are also listed on Annex IV (and some on Annex II) of the EC Habitats Directive giving further, European protection. Taken together the act and Conservation of Habitats and Species Regulations 2012 (as amended)* make it an offence to; intentionally or deliberately kill, injure or capture (take) bats;

- Deliberately disturb bats (whether in a roost or not);
- Damage, destroy or obstruct access to bat roosts;
- Possess or transport a bat or any part of a bat, unless acquired legally;
- Sell, barter or exchange bats, or parts of bats

The legislation although not strictly affording protection to foraging grounds does protect roost sites. Bat roosts are protected at all times of the year whether or not bats are present. Any disturbance of a roost due to development must be licenced.

**the regulations that delivered by the UK's commitments to the Habitats Directive.*

Breeding birds

All nesting birds are protected under the Wildlife and Countryside Act (as amended) 1981, which makes it an offence to intentionally kill, injure or take any wild bird or take, damage or destroy its nest whilst in use or being built, or take or destroy its eggs. Furthermore, a number of birds enjoy further protection under that Act and are listed on Schedule 1 of the Act. These further protected birds are also protected from disturbance and it may be necessary to operate “no-go” buffer zones around such nests – typically out to 100m.

Planning policy guidance on the treatment of species identified as priorities under the biodiversity action programme suggests that local authorities should take measures to protect the habitats of these species from further decline through policies in local development documents and should ensure that they are protected from the adverse effects of development, where appropriate, by using planning conditions or obligations. The conservation of these species should be promoted through the incorporation of beneficial biodiversity designs within developments.

Sequencing of works

A logical sequence of events is to be observed and shall be phased as follows.

Table 8: Sequence of Events

Stage	Event
Stage 1	Carry out tree works as specified within the summary of tree works
Stage 2	Installation of protective measures in accordance with the approved tree protection plan
Stage 3	Pre-commencement site meeting
Stage 4	Construction site set up
Stage 5	Undertake and complete construction works
Stage 6	Undertake external landscaping works outside of the construction exclusion zones
Stage 7	Removal of all machinery and materials from site
Stage 8	Arboricultural approval to dismantle and remove tree protection measures
Stage 9	Dismantle and removal of protective measures
Stage 10	Undertake external landscaping works within the construction exclusion zones
Stage 11	Sign off from project arboriculturist

Protective Measures

Protective measures are to be installed immediately following the completion of the tree works and are to be sited and aligned in accordance with the tree protection plan (Arbtech TPP 01) prior to the commencement of any works or the introduction of any machinery or material to site.

Upon installation of the protective measures around the retained trees the project arboriculturist will visit the site to inspect and document the position and specifications of the protective measures.

In the event that the protective measures and their positions do not comply with this arboricultural method statement document number Arbtech AMS 01 (05 April 2024) and tree protection plan drawing number Arbtech TPP 01, the project arboriculturist shall inform the client and fencing contractor so adjustments can be made.

When the protective measures comply with document number Arbtech AMS 01 (05 April 2024) and tree protection plan drawing number Arbtech TPP 01, the project arboriculturist will sign off the protective measures in writing to the client and will send a copy to the fencing contractor, site agent and local authority tree officer.

If the protective measures become damaged or there is any accident or emergencies involving trees, these areas are to be cordoned off immediately with high visibility plastic mesh fencing. The site agent is to photograph and document the damage and inform the project arboriculturist immediately after the incident and all work within in this area is to cease until the project arboriculturist has made a visit to the site. Any and all damaged sections of protective measures shall be replaced within 48 hours of the initial incident.

The protected area is sacrosanct and will not be invaded by the storage of materials, mixing of concrete or other products, accessed by machinery, equipment or pedestrians or in any other way disturbed by construction activity.

The protective measures will remain in place until the completion of stage 8 (see Sequencing of Works), there after they will be carefully dismantled only with the agreement of the project arboriculturist and or the local authority tree officer.

No equipment, vehicles or plant shall operate beyond the tree protection fencing. Booms, hoists and rigs should be kept as far away from the canopies of retained trees at all times. Where it is necessary to operate within 5m of a tree canopy, it will be done with the utmost caution and under the control of a banks man. Damage to trees will be considered a breach of this tree protection plan, which in turn could be a breach of planning permission.

Construction exclusion zone

A construction exclusion zone (CEZ) is a designated area where there is to be no construction activity what-so-ever. Access to the area for construction personnel or machinery is strictly prohibited and there is no scope for materials or waste storage etc. There may be some

construction activities planned for these areas (e.g., the installation of service trenches) these activities will be undertaken under direct, on-site arboricultural supervision.



Protective Barrier Fencing

Protective barrier fencing should be appropriate for the intensity and proximity of the development to protect trees where development activity is in close proximity.

Default specification: To comprise either 2.4m wooden site hoarding; or a 2.3m high scaffold framework, well braced to resist impacts, with uprights to be spaced at a maximum of 3.0m intervals and driven into the ground by a minimum of 600mm. On to this, standard anti-climb welded mesh panels are to be securely fixed to each other with at least two scaffold clamps and to the scaffold frame work with wire.

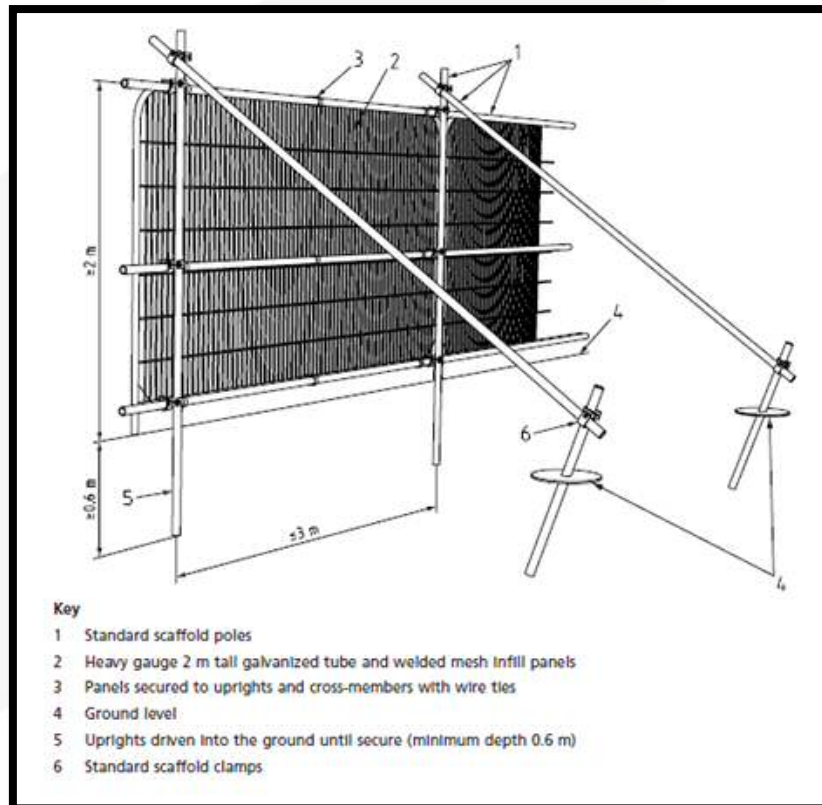


Figure 2: BS5837:2012 - Figure 2, Default specification for protective barriers.

Secondary specification: To comprise of 2m tall welded mesh panels on rubber or concrete feet. Panels are to be joined together using a minimum of two anti-tamper couplers, installed so that they can only be removed from inside the fence. The panels should be supported on the inner side by stabiliser struts, which should be attached to a base plate and secured with ground pins.

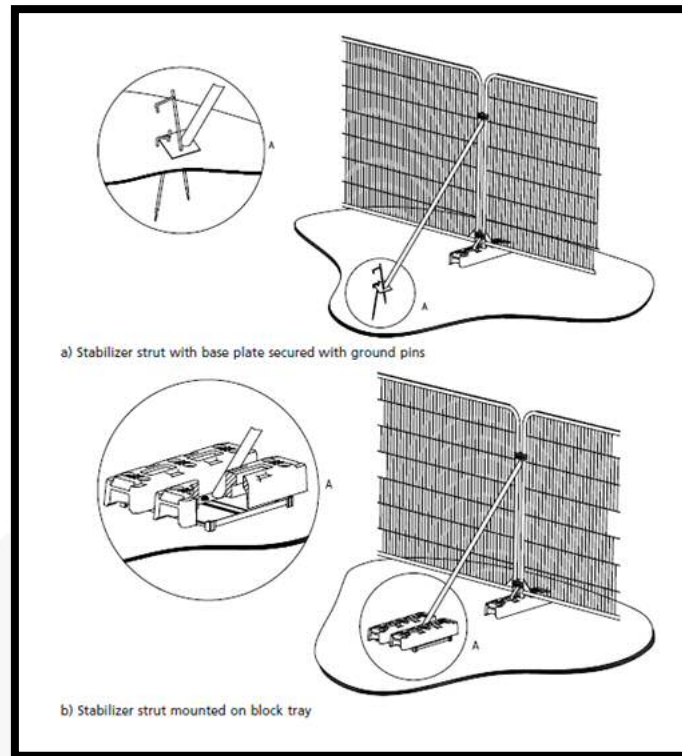


Figure 3: BS5837:2012 - Figure 3, Examples of above-ground stabilising systems.

Signage denoting the words “*tree protection area*” at 5.0m intervals should be fixed to the protective barrier fencing (See Appendix 2).

Protective fencing is to be removed **ONLY** with the written permission of the arboricultural consultant and approval of the local planning authority (LPA).

Construction

Prior to the construction of the proposed development, a copy of the construction method statement should have been submitted and approved by the project arboriculturist and LPA tree officer, to ensure that there is no conflict with this method statement.

All excavations and construction work within or immediately adjacent to RPAs or canopies of retained trees is to be undertaken under the direct on-site supervision of an arboriculturist.

The proposed development does not impact upon any of the retained trees and as such will require no specialist construction methodology.

Prohibition

- Mechanical digging or scraping is not permitted within a defined root protection area or within areas cordoned off by protective barrier fencing.
- No access will be permitted within the protected areas;
- No materials, equipment or debris will be stored within any of the fenced areas, or against the fencing;
- Fires are not permitted within 10m of any vegetation.
- Leaning objects against or attaching of objects to a tree is not permitted.
- Machinery, plant and vehicles are not permitted to be washed down within 10m of vegetation.
- Chemicals and materials are not to be transported, stored, used or mixed within a root protection area or within areas cordoned off by protective barrier fencing.
- Cement silos, mixing site to be situated within a bunded area to prevent spillage/leaking of chemicals harmful to trees. These areas are to be sited well clear of protected trees.
- Refuelling of plant or machinery is prohibited within 10m of the construction exclusion zones.
- It is essential that allowance should be made for the slope of the ground so that damaging materials such as concrete washings, mortar or diesel oil cannot run towards trees.
- Where machinery is to be used within 5m of retained tree canopies a banks man will be required at all times whilst setting up, moving or operating within this distance of retained trees canopies.
- Storage of all caustic material and chemicals are to be situated well clear of protected areas and preferably on lower ground if slopes are present, or to be situated within a bonded area to prevent any spills or leaks entering the ground.

Site Management

The site manager will be responsible for briefing and inducting all personnel who will be working on any stage of this development and especially those who will be working within or adjacent to the canopies or RPAs of retained trees; and will make them aware of, and provide a copy of this method statement and tree protection plan drawing number Arbtech TPP 01; this is to include but not exclusively the movement and or operation of plant, excavations, unloading deliveries, mixing and or pouring of cement and concrete.

The site manager will be responsible for the day to day running and protection of all retained trees and for liaising with the project arborist about any tree related matters and prior to any works that may or will affect the RPAs or canopies of retained trees; this is to include but not exclusively the movement and or operation of plant, excavations, unloading deliveries, mixing, pouring and storage of all caustic materials that may cause harm to retained trees.

Any incidents of damage to retained trees or of tree protection measures will be documented by the site manager who will then report these incidents to the project arboriculturist immediately and make sure that works within this area cease until the project arborist has had an opportunity to inspect the damage and where appropriate, agree a mitigation plan with the local planning authority tree officer.

The site manager may designate another person to take charge of briefing and inducting process of new site personnel or visitors in his absence.

If the site manager is replaced or is absent from site for more than three consecutive working days, the project arborist will be informed, and a prestart meeting will be held with the new or acting site manager.

It is the responsibility of the site manager to ensure that the planning conditions attached to the planning consent are adhered to at all times and that a monitoring regime and supervision of any works within or adjacent to the RPAs are adopted.

If at any time pruning works are required other than those previously approved, permission must be sought from the LPA tree officer and once permission is granted, they are to be carried out by a suitably qualified person in accordance with BS3998:2010 Tree work – Recommendations.

Services

Detailed drawings of proposed underground services are not available at this time; hence it is not possible to identify any specific potential impacts associated with the scheme at this stage.

Existing services within the site should be retained wherever possible. Where existing services within RPAs require upgrading, the upmost care must be taken to minimise disturbance, and where feasible trenchless techniques are to be employed, and only where necessary should open excavations be considered.

Where new services are to be introduced into the site they should be located outside of RPAs, where they will not interfere with tree roots. If any excavations are required within the RPAs all trenches are to be excavated by hand and radially to the tree trunks under direct on-site arboricultural supervision and are to be carried out under NJUG guidelines.

Final positions of any proposed services should be verified and approved by the arboricultural consultant and local authority tree officer before implementation.

New Underground services

Trenching for installation of underground services and drainage routes could sever any roots that may be present and as such adversely affects the health of the tree. For this reason, particular care should be taken in routing and methods of installation of all underground services. All underground services and drainage routes should be located so that no excavations are required within RPAs.

Where it has been impossible to keep underground services from passing through RPAs or within close proximity to trees, these sections are to be installed in one of three ways in accordance with the guidance set out in National Joint Utilities Group guidelines (NJUG 4), under on-site arboricultural supervision.

Trenchless Techniques

There are three main types of trenchless techniques, these include, guided and unguided boring and pipe replacement by lining or bursting. These allow for the installation, maintenance or renewal of underground services, without the disturbance of soil in which roots are likely to be growing. Starting and receiving pits for the boring machinery are to be located outside of the RPAs of any retained trees, with the bore depth being maintained at a minimum depth of 600mm below the existing ground level.

Techniques involving external lubrication of the equipment shall use no material other than water as other lubricants could contaminate the soil (e.g., oil, bentonite, etc.).

Manual Excavation

Excavation within RPAs will be undertaken by hand under direct on-site arboricultural supervision of the required depth of the foundation; Or to a minimum of 600mm deep of any

excavation, whether for proposed foundations, hard surfacing or underground services. The total depth of the manual excavation will be determined by the arboriculturist whilst on site.

The soil is to be loosened with the aid of a fork or pickaxe and then cleared with the aid of an Air-spade, Air-vac and or shovel. Any roots found will be cleanly severed by the arboricultural consultant with either a hand saw or secateurs.

Any roots found with a diameter of less than 25mm shall be cleanly severed by the arboricultural consultant. Any roots of 25mm and above shall be excavated around without damaging them; the arboricultural consultant shall decide if it's feasible or necessary to retain the root, if not it shall be severed.

The edge of the excavation closest to the trees will be covered with damp hessian to prevent soil collapse or contamination by concrete.

Soil beneath the depth may be sheet piled, regular piled or excavated deeper. Machinery may be used for this providing that it is situated outside of the RPA or has appropriate ground protection in place to move around on and work upon.

Broken Trench – Hand Dug

This technique combines both trenchless techniques and manual excavation where excavation is unavoidable. Excavations should be limited to where there is clear access around and below the roots. All trenches shall be excavated by hand with the same precautions taken as for manual excavation. Open section of trench should only be large enough to allow access for linking to the next section.

Landscaping

The ratio of trees removed to trees replanted should not necessarily be 1:1. Instead, the ratio should take into consideration the available space for tree growth and development in order to ensure the trees are physically suited to the site at maturity. A specification for and notation relating to the precise alignment of replacement trees is contained in the landscape proposals.

Landscaping around retained trees may only be carried out once all tree protection measures have been removed (planting, turfing, fencing etc.).

All excavations within the Root Protection Areas shall be undertaken by hand and without reducing current ground levels unless it is agreed in writing with the LPA. At no time is the use of a rotavator permitted within the RPAs of retained tree.

Any tree roots discovered will be left in-situ and shall not be cut or otherwise damaged. Where possible, the soil structure within the Root Protection area shall be preserved.

No works will be carried out within the RPAs of any trees if the soil moisture is of such a level that soil compaction may be likely. Should the soil become compacted or has poor structure which would hinder the development of the existing trees and plants or any new plantings the arboriculturist should be consulted about soil decompaction techniques.

Monitoring and Supervision

Where trees have been identified within this method statement and tree protection plan drawing number Arbtech TPP 01 for retention, there should be an auditable system of arboricultural monitoring. This is to extend to arboricultural supervision whenever demolition or construction activity is to take place within or adjacent to any canopy or RPA.

The development's tree protection measures are to be monitored and all demolition and construction works to be undertaken within or adjacent to the RPAs of retained trees are to be supervised by project arboriculturist, who should be retained to record and report observations to the council at appropriate intervals.

Pre-commencement site meeting

Prior to the commencement of any works or machinery and materials arriving on site a pre-commencement site meeting involving the project arborist, landowner or agent, site manager, contractors and engineer (as appropriate) and the relevant LPA officers will be held to ensure that all aspects of the arboricultural method statement and tree protection are understood and for all parties to swap contact details (see Appendix 3).

Monitoring and supervision schedule

The initial monitoring visit will be to check that the tree protective measures are in the correct location and as specified within the approved method statement; if so to sign off their installation.

There after monitoring visits are to take place at regular intervals, to ensure that tree protection measures are in place and are functioning as designed or whenever necessary to undertake works to be carried out under arboricultural supervision. The frequency of the monitoring visits is to be determined with the LPA tree officer at the pre-commencement site meeting.

A record of all arboricultural monitoring and supervision visits will be kept and any faults will be logged, this will then be copied to the site agent, developer and local planning authority in a digital format.

If during the course of the development, it is necessary for areas to be re-designed so that they would require changes to the approved arboricultural method statement or tree protection plan and so affecting retained trees the project arborist and LPA tree officer will be invited to attend a site meeting with all relevant parties. Prior to any changes being implemented these must have been approved in writing by the LPA tree officer.

Supervision

The arboricultural consultant will be required to attend site to directly supervise all demolition and construction works that are to be undertaken within or adjacent to the RPAs of all retained trees and will be advised a minimum of 72 hours prior to the commencement of any works that require his attendance, these will include:

1. Pre-commencement site meeting;
2. Location of protective measures;
3. Any demolition and or excavations within or adjacent to RPAs, including foundations, hard surfacing or underground services (a non-exhaustive list).
4. Arboricultural sign off and removal of protective measures.

Completion meeting

Once all construction works have been completed all materials and machinery has been removed from site the project arborist shall be informed and will invite the LPA tree officer to meet on site to discuss the process and discuss any final remedial works that may be required and to sign the development off so that the protective measures may be removed.

Appendix 1: Tree Survey Schedule

BS5837:2012 Tree Survey

Arbtech Consulting Limited

Client: HSP Consulting Engineers Limited on behalf of WEPCo
 Project: Cardiff Airport Technology College site, CF623BD
 Survey Date: 22/10/2023
 Surveyor: Thomas Ramm

Unit 3, Well House Barns
 Chester Road
 Chester
 Cheshire
 CH4 0DH
 Phone: 01244661170

Tree and Tag No Species	Hght (m)	Stems		Crown		Age	RP A (m ²) R (m)	Phys Condition	Structural Condition	Preliminary Recommendations Survey Comment	Cat ERC		
		No	Ø (mm)	Spread (m)	Clear (m)								
Estimated Measurements													
G01													
Various	12	1	320	N	6	0.5	SM	A: 46.3	Good	C: Good	Group is situated to the eastern boundary line; Group is comprised of circa 100+ stems with species to include ash, cherry, hawthorn, field maple and dense scrub; Dimensions recorded represent maximum for group.		
<i>See comments for details</i>				E	6	0.5		R: 3.83		S: Good			
				S	6	0.5				B: Good			
				W	6	0.5							
20+ yrs													
Estimated Measurements													
G02													
Various	10	1	260	N	5	0.5	SM	A: 30.6	Good	C: Good	Group is situated within the middle grounds of site; Group is comprised of circa 75+ stems with species to include ash, cherry, hawthorn, field maple, sycamore, hazel and dense scrub; Dimensions recorded represent maximum for group.		
<i>See comments for details</i>				E	5	0.5		R: 3.12		S: Good			
				S	5	0.5				B: Good			
				W	5	0.5							
20+ yrs													
Estimated Measurements													
G03													
Various	8	1	180	N	5	0.5	SM	A: 14.7	Good	C: Good	Group is situated within the middle grounds of site; Group is comprised of circa 25+ stems with species to include ash, hawthorn, field maple, with the majority of group being dense scrub; Dimensions recorded represent maximum for group.		
<i>See comments for details</i>				E	5	0.5		R: 2.16		S: Good			
				S	5	0.5				B: Good			
				W	5	0.5							
10+ yrs													
Estimated Measurements													
G04													
Various	10	1	270	N	5	0.5	SM	A: 33	Good	C: Good	Group is situated within the middle grounds of site; Group is comprised of circa 50+ stems with species to include ash, hawthorn, field maple, hazel with the majority of the group comprised of dense scrub; Dimensions recorded represent maximum for group.		
<i>See comments for details</i>				E	5	0.5		R: 3.24		S: Good			
				S	5	0.5				B: Good			
				W	5	0.5							
20+ yrs													
Age Classifications:	N	Newly planted	EM	Early Mature				Condition:	C	Crown	Stems:	Ø	Diameter
	Y	Young	M	Mature					S	Stem		(Eq) Equivalent stem diameter using BS5837:2012 definition	
	SM	Semi-mature	OM	Over Mature					B	Basal area	ERC:	Estimated Remaining Contributio	

Tree and Tag No Species	Hght (m)	Stems		Crown		Age	RP A (m ²) R (m)	Phys Condition	Structural Condition	Preliminary Recommendations Survey Comment	Cat ERC	
		No	Ø (mm)	Spread (m)	Clear (m)							
Estimated Measurements												
G05	4	1	180	N	3	0.5	SM	A: 14.7 R: 2.16	Good	C: Good S: Good B: Good	Group is situated within the middle grounds of site; Group is comprised of circa 25+ stems with species to include hawthorn, field maple and hazel with the majority of group being dense scrub; Dimensions recorded represent maximum for group.	C.1.2 10+ yrs
Various				E	3	0.5						
<i>See comments for details</i>				S	3	0.5						
				W	3	0.5						
Estimated Measurements												
G06	4	1	180	N	3	0.5	SM	A: 14.7 R: 2.16	Good	C: Good S: Good B: Good	Group is situated within the middle grounds of site; Group is comprised of circa 30+ stems with species to include hawthorn, field maple and hazel with the majority of group being dense scrub; Dimensions recorded represent maximum for group.	C.1.2 10+ yrs
Various				E	3	0.5						
<i>See comments for details</i>				S	3	0.5						
				W	3	0.5						
Estimated Measurements												
G07	12	1	320	N	6	0.5	SM	A: 46.3 R: 3.83	Good	C: Good S: Good B: Good	Group is situated within the middle grounds of site; Group is comprised of circa 75+ stems with species to include ash, cherry, hawthorn, field maple, sycamore, hazel and dense scrub; Dimensions recorded represent maximum for group.	B.1.2 20+ yrs
Various				E	6	0.5						
<i>See comments for details</i>				S	6	0.5						
				W	6	0.5						
Estimated Measurements												
G08	12	1	340	N	6	0.5	SM	A: 52.3 R: 4.08	Good	C: Good S: Good B: Good	Group is situated within the middle grounds of site; Group is comprised of circa 75+ stems with species to include ash, cherry, hawthorn, field maple, sycamore, hazel, goat willow and dense scrub; Dimensions recorded represent maximum for group.	B.1.2 20+ yrs
Various				E	6	0.5						
<i>See comments for details</i>				S	6	0.5						
				W	6	0.5						
Estimated Measurements												
T01	4	1	120	N	3	3	SM	A: 6.5 R: 1.43	Good	C: Good S: Fair B: Fair	Tree is situated to southern boundary line; Historical mechanical damage to base to southern main stem; Naturally occurring deadwood typical for species.	C.1 10+ yrs
Silver Birch				E	3	3						
<i>Betula pendula</i>				S	1	3						
				W	1	3						
Age Classifications:	N	Newly planted	EM	Early Mature	Condition:			C	Crown	Stems:	Ø	Diameter
	Y	Young	M	Mature				S	Stem		(Eq)	Equivalent stem diameter using BS5837:2012 definition
	SM	Semi-mature	OM	Over Mature				B	Basal area	ERC:		Estimated Remaining Contributio

Tree and Tag No Species	Hght (m)	Stems		Crown		Age	RP A (m ²) R (m)	Phys Condition	Structural Condition	Preliminary Recommendations Survey Comment	Cat ERC		
		No	Ø (mm)	Spread (m)	Clear (m)								
T02													
Silver Birch <i>Betula pendula</i>	6	1	210	N	3	3	SM	A: 20 R: 2.52	Good	C: Good S: Fair B: Fair	C.1.2 10+ yrs		
				E	4	2					Tree is situated to southern boundary line; Main stem leans to the east from base; Historical mechanical damage to base to southern main stem; Naturally occurring deadwood typical for species.		
				S	2	3							
				W	2	3							
T03													
Silver Birch <i>Betula pendula</i>	4	1	110	N	2	3	SM	A: 5.5 R: 1.32	Fair	C: Good S: Fair B: Fair	C.1.2 10+ yrs		
				E	2	3					Tree is situated to southern boundary line; Historical mechanical damage to base to southern main stem; Sparse foliage throughout crown; Naturally occurring deadwood typical for species.		
				S	2	3							
				W	2	3							
T04													
Silver Birch <i>Betula pendula</i>	4	1	170	N	4	2	SM	A: 13.1 R: 2.04	Good	C: Fair S: Fair B: Fair	C.1.2 10+ yrs		
				E	3	2					Tree is situated to southern boundary line; Historical mechanical damage to exposed roots to the south; Main stem leans to the east from 0.2 m; Naturally occurring deadwood typical for species.		
				S	1	2							
				W	2	2							
T05													
Silver Birch <i>Betula pendula</i>	5	2	278 (Eq)	N	4	2	SM	A: 34.9 R: 3.33	Good	C: Fair S: Fair B: Fair	C.1.2 10+ yrs		
				E	3	2					Tree is situated to southern boundary line; Historical mechanical damage to exposed roots to the south; Main stem bifurcates to primary limb to the east at 0.5 m; Naturally occurring deadwood typical for species.		
				S	2	2							
				W	2	2							
T06													
Silver Birch <i>Betula pendula</i>	3	1	160	N	3	2	SM	A: 11.6 R: 1.92	Good	C: Fair S: Good B: Fair	C.1.2 10+ yrs		
				E	2	2					Tree is situated to southern boundary line; Historical mechanical damage to exposed roots to the south; Naturally occurring deadwood typical for species.		
				S	2	2							
				W	2	2							
Age Classifications:	N	Newly planted	EM	Early Mature	Condition:			C	Crown	Stems:		Ø	Diameter
	Y	Young	M	Mature				S	Stem			(Eq)	Equivalent stem diameter using BS5837:2012 definition
	SM	Semi-mature	OM	Over Mature				B	Basal area	ERC:			Estimated Remaining Contributio

Tree and Tag No Species	Hght (m)	Stems		Crown		Age	RP A (m ²) R (m)	Phys Condition	Structural Condition	Preliminary Recommendations Survey Comment	Cat ERC
		No	Ø (mm)	Spread (m)	Clear (m)						
T07											
Common Ash <i>Fraxinus excelsior</i>	4	2	175 (Eq)	N E S W	1 1 1 1	0.5 0.5 0.5 0.5	Y A: 13.8 R: 2.09	Decline	C: Poor S: Poor B: Good	Tree is situated north of southern boundary line; Main stem bifurcates at 0.5 m to codominant stem; Tree is showing visible signs of ash dieback (<i>Hymenocyphus fraxineus</i>); Tree is in early stages of terminal decline.	U 10+ yrs
T08											
Field Maple <i>Acer campestre</i>	5	1	100	N E S W	3 3 3 3	0.5 0.5 0.5 0.5	SM A: 4.5 R: 1.19	Fair	C: Fair S: Fair B: Good	Tree is situated to the north of the southern boundary line; Crown breaks to subsidiary stems comprised of 10+ stems at 0.5 m; Dimensions recorded represent average for stem diameter; Low foliage density throughout crown.	C.1 10+ yrs
T09											
Silver Birch <i>Betula pendula</i>	4	2	135 (Eq)	N E S W	2 1 2 2	2 2 2 2	SM A: 8.2 R: 1.61	Good	C: Good S: Fair B: Good	Tree is situated to southern boundary line; Historical mechanical damage to exposed roots to the south; Main stem bifurcates to co dominant stem at 0.2 m; Asymmetrical crown due to suppression from adjacent companion trees; Naturally occurring deadwood typical for species.	C.1.2 10+ yrs
T10											
Silver Birch <i>Betula pendula</i>	5	1	220	N E S W	3 2 2 2	2 2 2 2	SM A: 21.9 R: 2.64	Good	C: Good S: Good B: Good	Tree is situated to southern boundary line; Historical mechanical damage to exposed roots to the south; Asymmetrical crown due to suppression from adjacent companion trees; Naturally occurring deadwood typical for species.	B.1.2 20+ yrs
T11											
Silver Birch <i>Betula pendula</i>	5	1	170	N E S W	3 2 1 2	2 2 1 2	SM A: 13.1 R: 2.04	Fair	C: Good S: Good B: Good	Tree is situated to southern boundary line; Historical mechanical damage to exposed roots to the south; Asymmetrical crown due to suppression from adjacent companion trees; Crown is showing low foliage density throughout crown.	C.1.2 10+ yrs
Age Classifications:	N	Newly planted	EM	Early Mature	Condition:		C	Crown	Stems:	Ø	Diameter
	Y	Young	M	Mature			S	Stem		(Eq)	Equivalent stem diameter using BS5837:2012 definition
	SM	Semi-mature	OM	Over Mature			B	Basal area	ERC:		Estimated Remaining Contributio

Tree and Tag No Species	Hght (m)	Stems		Crown		Age	RP A (m ²) R (m)	Phys Condition	Structural Condition	Preliminary Recommendations Survey Comment	Cat ERC
		No	Ø (mm)	Spread (m)	Clear (m)						
T12											
Silver Birch <i>Betula pendula</i>	5	1	130	N E S W	3 2 2 1	3 3 3 3	SM A: 7.6 R: 1.55	Good	C: Good S: Good B: Good	Tree is situated to southern boundary line; Historical mechanical damage to exposed roots to the south; Main stem leans to the east from base; Asymmetrical crown due to suppression from adjacent companion trees; Naturally occurring deadwood typical for species.	C.1.2 10+ yrs
T13											
Silver Birch <i>Betula pendula</i>	6	2	184 (Eq)	N E S W	3 2 2 1	3 3 3 3	SM A: 15.4 R: 2.21	Good	C: Good S: Fair B: Good	Tree is situated to southern boundary line; Historical mechanical damage to exposed roots to the south; Main stem bifurcates from base to co dominant stem; Asymmetrical crown due to suppression from adjacent companion trees; Naturally occurring deadwood typical for species.	C.1.2 10+ yrs
T14											
Field Maple <i>Acer campestre</i>	5	4	383 (Eq)	N E S W	3 3 2 3	1 1 1 1	SM A: 66.2 R: 4.59	Good	C: Good S: Fair B: Good	Tree is situated on southern boundary line; Tree is comprised of x 4 subsidiary stems; Naturally occurring deadwood typical for species.	C.1.2 10+ yrs
T15											
Goat Willow <i>Salix caprea</i>	4	4	361 (Eq)	N E S W	5 4 2 1	2 2 2 2	SM A: 58.9 R: 4.32	Poor	C: Poor S: Poor B: Poor	Tree is situated on southern boundary line; Main stem breaks to multistems at ground level; Large linear crack to northern stem wound not yet occluded; Natural bracing throughout crown; Historically pruned to eastern crown; Poor historical pruning resulting in poor physiological condition.	C.1.2 10+ yrs
T16											
Silver Birch <i>Betula pendula</i>	3	1	100	N E S W	1 1 1 1	2 2 2 2	SM A: 4.5 R: 1.19	Good	C: Good S: Good B: Good	Tree is situated to southern boundary line; Historical mechanical damage to exposed roots to the south; Asymmetrical crown due to suppression from adjacent companion trees; Naturally occurring deadwood typical for species.	C.1.2 10+ yrs
Age Classifications:	N	Newly planted	EM	Early Mature	Condition:		C	Crown	Stems:	Ø	Diameter
	Y	Young	M	Mature			S	Stem		(Eq)	Equivalent stem diameter using BS5837:2012 definition
	SM	Semi-mature	OM	Over Mature			B	Basal area	ERC:		Estimated Remaining Contributio

Tree and Tag No Species	Hght (m)	Stems		Crown		Age	RP A (m ²) R (m)	Phys Condition	Structural Condition	Preliminary Recommendations Survey Comment	Cat ERC	
		No	Ø (mm)	Spread (m)	Clear (m)							
T17												
Silver Birch <i>Betula pendula</i>	4	1	180	N	2	2	SM	A: 14.7 R: 2.16	Good	C: Good S: Good B: Good	C.1.2 10+ yrs	
T18												
Silver Birch <i>Betula pendula</i>	4	1	130	N	2	2	SM	A: 7.6 R: 1.55	Good	C: Good S: Good B: Good	C.1.2 10+ yrs	
T19												
Silver Birch <i>Betula pendula</i>	4	2	135 (Eq)	N	2	3	SM	A: 8.2 R: 1.61	Good	C: Good S: Good B: Good	C.1.2 10+ yrs	
T20												
Silver Birch <i>Betula pendula</i>	4	1	90	N	1	3	SM	A: 3.7 R: 1.08	Good	C: Good S: Good B: Good	C.1.2 10+ yrs	
Age Classifications:	N	Newly planted	EM	Early Mature	Condition:			C	Crown	Stems:	Ø	Diameter
	Y	Young	M	Mature				S	Stem		(Eq)	Equivalent stem diameter using BS5837:2012 definition
	SM	Semi-mature	OM	Over Mature				B	Basal area	ERC:		Estimated Remaining Contributio

Tree and Tag No Species	Hght (m)	Stems		Crown		Age	RP A (m ²) R (m)	Phys Condition	Structural Condition	Preliminary Recommendations Survey Comment	Cat ERC	
		No	Ø (mm)	Spread (m)	Clear (m)							
T21												
Silver Birch <i>Betula pendula</i>	4	1	120	N	1	2	SM	A: 6.5 R: 1.43	Good	C: Good S: Good B: Good	C.1.2 10+ yrs	
				E	1	2						
				S	1	2						
				W	1	2						
T22												
Silver Birch <i>Betula pendula</i>	5	1	160	N	3	2	SM	A: 11.6 R: 1.92	Good	C: Good S: Good B: Good	C.1.2 10+ yrs	
				E	1	2						
				S	2	2						
				W	1	2						
T23												
Silver Birch <i>Betula pendula</i>	5	1	200	N	3	2	SM	A: 18.1 R: 2.4	Good	C: Good S: Good B: Good	C.1.2 10+ yrs	
				E	1	2						
				S	2	2						
				W	1	2						
T24												
Field Maple <i>Acer campestre</i>	5	1	180	N	3	0.5	SM	A: 14.7 R: 2.16	Fair	C: Fair S: Fair B: Good	C.1 10+ yrs	
				E	3	0.5						
				S	3	0.5						
				W	3	0.5						
T25												
Silver Birch <i>Betula pendula</i>	4	2	189 (Eq)	N	3	2	SM	A: 16.1 R: 2.26	Good	C: Good S: Good B: Good	C.1.2 10+ yrs	
				E	2	2						
				S	2	2						
				W	2	2						
Age Classifications:	N	Newly planted	EM	Early Mature	Condition:			C	Crown	Stems:	Ø	Diameter
	Y	Young	M	Mature				S	Stem		(Eq)	Equivalent stem diameter using BS5837:2012 definition
	SM	Semi-mature	OM	Over Mature				B	Basal area	ERC:		Estimated Remaining Contributio

Tree and Tag No Species	Hght (m)	Stems		Crown		Age	RP A (m ²) R (m)	Phys Condition	Structural Condition	Preliminary Recommendations Survey Comment	Cat ERC	
		No	Ø (mm)	Spread (m)	Clear (m)							
T26												
Silver Birch <i>Betula pendula</i>	7	1	250	N E S W	3 2 2 2	3 3 3 3	SM A: 28.3 R: 3	Good	C: Good S: Good B: Good	Tree is situated to southern boundary line; Asymmetrical crown due to suppression from adjacent companion trees; Naturally occurring deadwood typical for species.	C.1.2 10+ yrs	
T27												
Silver Birch <i>Betula pendula</i>	7	1	110	N E S W	1 2 1 1	3 3 3 3	SM A: 5.5 R: 1.32	Good	C: Good S: Good B: Good	Tree is situated to southern boundary line; Asymmetrical crown due to suppression from adjacent companion trees; Naturally occurring deadwood typical for species.	C.1.2 10+ yrs	
T28												
Silver Birch <i>Betula pendula</i>	7	1	140	N E S W	1 1 1 1	2 2 2 2	SM A: 8.9 R: 1.68	Decline	C: Good S: Good B: Good	Tree is situated to southern boundary line; Main stem showing signs of exposed sapwood; Tree is in decline.	U <10 yrs	
T29												
Silver Birch <i>Betula pendula</i>	4	2	230 (Eq)	N E S W	1 2 1 1	3 3 3 3	SM A: 24 R: 2.76	Fair	C: Good S: Fair B: Good	Tree is situated to southern boundary line; Main stem bifurcates from ground level to co dominant stem; Asymmetrical crown due to suppression from adjacent companion trees; Sparse foliage throughout crown.	C.1.2 10+ yrs	
T30												
Silver Birch <i>Betula pendula</i>	5	1	130	N E S W	1 1 0 1	3 3 3 3	SM A: 7.6 R: 1.55	Fair	C: Fair S: Good B: Good	Tree is situated to southern boundary line; Asymmetrical crown due to suppression from adjacent companion trees; Sparse foliage throughout crown.	C.1.2 10+ yrs	
T31												
Field Maple <i>Acer campestre</i>	7	2	355 (Eq)	N E S W	3 2 3 2	3 3 3 3	SM A: 56.9 R: 4.25	Good	C: Good S: Good B: Good	Tree is situated to southern boundary line; Main stem bifurcates at 0.5 m to co dominant stem; Naturally occurring deadwood typical for species.	B.1.2 20+ yrs	
Age Classifications:	N	Newly planted	EM	Early Mature	Condition:			C	Crown	Stems:	Ø	Diameter
	Y	Young	M	Mature				S	Stem		(Eq)	Equivalent stem diameter using BS5837:2012 definition
	SM	Semi-mature	OM	Over Mature				B	Basal area	ERC:		Estimated Remaining Contributio

Tree and Tag No Species	Hght (m)	Stems		Crown		Age	RP A (m ²) R (m)	Phys Condition	Structural Condition	Preliminary Recommendations Survey Comment	Cat ERC	
		No	Ø (mm)	Spread (m)	Clear (m)							
T32 Silver Birch <i>Betula pendula</i>	6	1	190	N E S W	2 1 2 2	3 3 3 3	SM A: 16.3 R: 2.27	Good	C: Good S: Good B: Good	Tree is situated to southern boundary line; Asymmetrical crown due to suppression from adjacent companion trees; Naturally occurring deadwood typical for species.	C.1.2 10+ yrs	
T33 Silver Birch <i>Betula pendula</i>	5	1	180	N E S W	2 1 1 2	3 3 3 3	SM A: 14.7 R: 2.16	Good	C: Good S: Good B: Good	Tree is situated to southern boundary line; Asymmetrical crown due to suppression from adjacent companion trees; Naturally occurring deadwood typical for species.	C.1.2 10+ yrs	
T34 Silver Birch <i>Betula pendula</i>	5	2	198 (Eq)	N E S W	2 1 2 2	3 3 3 3	SM A: 17.8 R: 2.38	Good	C: Good S: Good B: Good	Tree is situated to southern boundary line; Asymmetrical crown due to suppression from adjacent companion trees; Naturally occurring deadwood typical for species.	C.1.2 10+ yrs	
T35 Silver Birch <i>Betula pendula</i>	6	1	200	N E S W	2 1 2 2	3 3 3 3	SM A: 18.1 R: 2.4	Good	C: Good S: Good B: Good	Tree is situated to southern boundary line; Asymmetrical crown due to suppression from adjacent companion trees; Naturally occurring deadwood typical for species.	C.1.2 10+ yrs	
T36 Silver Birch <i>Betula pendula</i>	6	1	190	N E S W	3 1 2 2	3 3 2 1	SM A: 16.3 R: 2.27	Good	C: Good S: Good B: Good	Tree is situated to southern boundary line; Asymmetrical crown due to suppression from adjacent companion trees; Naturally occurring deadwood typical for species.	C.1.2 10+ yrs	
T37 Silver Birch <i>Betula pendula</i>	6	2	244 (Eq)	N E S W	3 4 2 1	3 3 2 1	SM A: 27 R: 2.93	Good	C: Good S: Good B: Good	Tree is situated to southern boundary line; Asymmetrical crown due to suppression from adjacent companion trees; Naturally occurring deadwood typical for species.	C.1.2 10+ yrs	
Age Classifications:	N	Newly planted	EM	Early Mature	Condition:			C	Crown	Stems:	Ø	Diameter
	Y	Young	M	Mature				S	Stem		(Eq)	Equivalent stem diameter using BS5837:2012 definition
	SM	Semi-mature	OM	Over Mature				B	Basal area	ERC:		Estimated Remaining Contributio

Tree and Tag No Species	Hght (m)	Stems		Crown		Age	RP A (m ²) R (m)	Phys Condition	Structural Condition	Preliminary Recommendations		Cat ERC
		No	Ø (mm)	Spread (m)	Clear (m)					Survey Comment		
T38												
Common Oak <i>Quercus robur</i>	6	1	720	N	4	3	M	A: 234.5 R: 8.63	Good	C: Good S: Fair B: Good	Tree has large cavity to eastern main stem from historical limb failure; Cavity is from ground level to 1.5 m; Main stem leans to the south from 1.5 m; Historical limb failure at 4 m to northern crown; Naturally occurring deadwood typical for species.	B.1.2 40+ yrs

Age Classifications:	N	Newly planted	EM	Early Mature	Condition:	C	Crown	Stems:	Ø	Diameter
	Y	Young	M	Mature		S	Stem		(Eq)	Equivalent stem diameter using BS5837:2012 definition
	SM	Semi-mature	OM	Over Mature		B	Basal area	ERC:		Estimated Remaining Contributio

Appendix 2: Tree Protection Notice

(To be printed at A3 or larger)

Tree Protection Area

KEEP OUT

Do not move this fence

(TOWN & COUNTRY PLANNING ACT 1990)

**TREES ENCLOSED BY THIS FENCE ARE PROTECTED BY PLANNING CONDITIONS AND/OR
ARE THE SUBJECT OF A TREE PRESERVATION ORDER.**

**CONTRAVENTION OF A TREE PRESERVATION ORDER MAY LEAD TO CRIMINAL
PROSECUTION**

**ANY INCURSION INTO THE PROTECTED AREA MUST BE WITH THE WRITTEN PERMISSION
OF THE LOCAL PLANNING AUTHORITY**



Arbtech Consulting Limited.
Unit 3, Well House Barn, Chester Road, Chester, CH4 0DH
<https://arbtech.co.uk> - 01244 661170

Appendix 3: Contact Details

Name	Position	Company	Contact
	Client		
	Agent / Project Manager		
	Tree Officer		
	Arboricultural Consultant	Arbtech Consulting Ltd.	01244 661170 https://arbtech.co.uk
	Site Manager		
	Main contractor		

Document Production Record

Document number	Editor	Signature	Position	Issue number	Date
Arbtech AMS 01A	Emily Kempson		Senior Consultant	01	05/04/24

Limitations

Arbtech Consulting Ltd has prepared this Report for the sole use of the above-named Client/Agent in accordance with our terms of business, under which our services were performed. No other warranty, expressed or implied, is made as to the professional advice included in this Report or any other services provided by us. This Report may not be relied upon by any other party without the prior and express written agreement of Arbtech Consulting Ltd. The assessments made assume that the sites and facilities will continue to be used for their current purpose without significant change. The conclusions and recommendations contained in this Report are based upon information provided by others and upon the assumption that all relevant information has been provided by those parties from whom it has been requested. Information obtained from third parties has not been independently verified by Arbtech Consulting Ltd.

Copyright

© This Report is the copyright of Arbtech Consulting Ltd. Any unauthorised reproduction or usage by any person other than the addressee is strictly prohibited.